

TECHNICAL CARD



VIDEX®



IK07



-25° +50°C



Free



IP54

WARRANTY 2 YEARS

General parameters

Light source replaceable end user

Electrical parameters

Rated voltage, frequency AC 220-240 V, 50/60 Hz

Input interface Free wire ends

Additional information

Place of installation Ceiling, Recessed

Place of application indoor

Impact protection IK07

Housing colour White

Operating temperature range -25° +50°C

Mercury content Does not contain

Ingress protection IP54

Housing material Aluminum

Dimensions

EAN 4820246482851

Height 50 mm

Recessed spotlight luminaire VL-SPF10R-W


INDEX: VL-SPF10R-W

Depth 85 mm

Outer box 50 pcs.

Width 85 mm

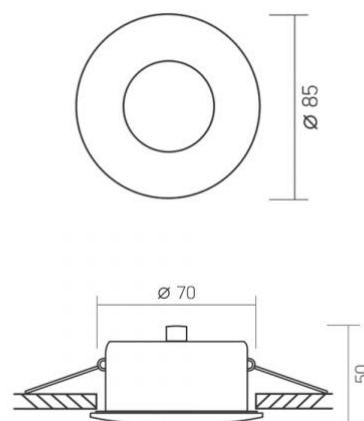

INDEX: VL-SPF10R-W


We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.



The product must be used indoors



IK07

— The product withstands a medium impact (e.g., from a blunt object)



-25° +50°C

— Operating temperatures range



Free

— The product does not contain mercury



IP54

— Class of protection against dust and moisture. The product is protected against the ingress of water and dust particles into the housing