

INDEX: VL-SPF10R-W

TECHNICAL CARD



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®



IK07



-25° +50°C



Free



IP54

WARRANTY 2 YEARS

General parameters

Light source replaceable end user

Electrical parameters

Rated voltage, frequency AC 220-240 V, 50/60 Hz

Input interface Free wire ends

Additional information

Place of installation Ceiling, Recessed

Place of application indoor

Impact protection IK07

Housing colour White

Operating temperature range -25° +50°C

Mercury content Does not contain

Ingress protection IP54

Housing material Aluminum

Dimensions

EAN 4820246482851

Outer box 50 pcs.

Recessed spotlight luminaire VL-SPF10R-W


INDEX: VL-SPF10R-W

Height 50 mm

Width 85 mm

Depth 85 mm

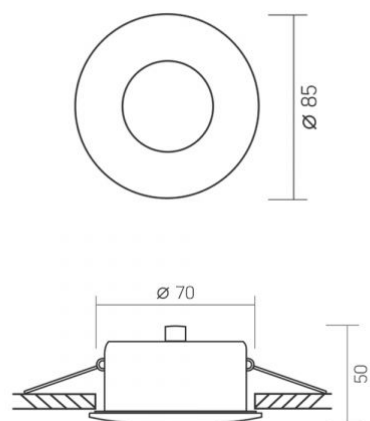

INDEX: VL-SPF10R-W


We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.



The product must be used indoors



IK07

The product withstands a medium impact (e.g., from a blunt object)



-25° +50°C

Operating temperatures range



Free

The product does not contain mercury



IP54

Class of protection against dust and moisture. The product is protected against the ingress of water and dust particles into the housing