

## TECHNICAL CARD



Recessed spotlight luminaire



IK07



-25° +50°C



Free



IP20

## WARRANTY 2 YEARS

### General parameters

Light source replaceable end user

### Electrical parameters

Rated voltage, frequency AC 220-240 V, 50/60 Hz

Input interface Terminal block

Electric shock protection class II

### Additional information

Place of installation Ceiling, Recessed

Place of application indoor

Impact protection IK07

Housing colour Black

Operating temperature range -25° +50°C

Mercury content Does not contain

Ingress protection IP20

Housing material Aluminum

### Dimensions

EAN 4820246485906

## VIDEX for GX53 lamp VL-SPF27R-B

### INDEX: VL-SPF27R-B

Height 30 mm

Depth 108 mm

In the package 1 pc.

Outer box 50 pcs.


Width 108 mm

Unit nett weight 200g

### Signs marking goods

Packaging marking CE, Utilization

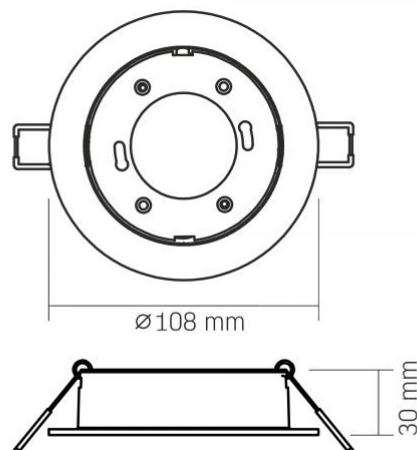

**INDEX: VL-SPF27R-B**

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.



The product must be used indoors



Class of protection against electric shock II - provided not only by basic insulation but also by double or reinforced insulation



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



IK07

The product withstands a medium impact (e.g., from a blunt object)



-25° +50°C

Operating temperatures range



Free

The product does not contain mercury



IP20

Class of protection against dust and moisture. Protection against solid objects larger than 12 mm; no protection against moisture