

## TECHNICAL CARD



Tactical LED Flashlight



## WARRANTY 3 YEARS

### General parameters

**Light source replaceable** no

### Type of light source

**Dimmable** no

**Technology** LED

### Electrical parameters

**On-mode power (Pon)** 20 W

**Input interface** USB-C

### Photometric parameters

**Useful luminous flux of the contained light source (Φ<sub>use</sub>)** 2000 Lm

**Correlated color temperature** 5000K (neutral white), Red, Green

**Peak luminous intensity** 77600 cd

### Additional information

**Housing colour** Black

**Fall protection** 2 m

**Operating temperature range** -20° +40°C

## VIDEX VLF-AT255RG 2000Lm 5000K

### INDEX: VLF-AT255RG

**Battery type** Li-ion 21700, Li-ion 18650

**Battery voltage** 3.7 V

**Battery capacity** 4000 mAh

**Battery indicator** 5 level

**Battery replaceable** yes

**Mercury content** Does not contain

**Ingress protection** IP68

**Housing material** Heavy-anodized aircraft aluminum

### Dimensions

**EAN** 4820246483704

**Height** 150 mm

**Depth** 31 mm

**Width** 40 mm

**In the package** 1 pc.

**Outer box** 20 pcs.

**Unit nett weight** 159g

### Signs marking goods

**Packaging marking** CE, Utilization

**VIDEX<sup>®</sup>**

VIDEX VLF-AT255RG 2000Lm 5000K

**INDEX: VLF-AT255RG**

**VIDEX®**

VIDEX VLF-AT255RG 2000Lm 5000K

**INDEX: VLF-AT255RG**

**VIDEX®****VIDEX VLF-AT255RG 2000Lm 5000K****INDEX: VLF-AT255RG**

# VIDEX®

VIDEX VLF-AT255RG 2000Lm 5000K

INDEX: VLF-AT255RG



**VIDEX®**

VIDEX VLF-AT255RG 2000Lm 5000K


**INDEX: VLF-AT255RG**



# VIDEX®

## VIDEX VLF-AT255RG 2000Lm 5000K

### INDEX: VLF-AT255RG

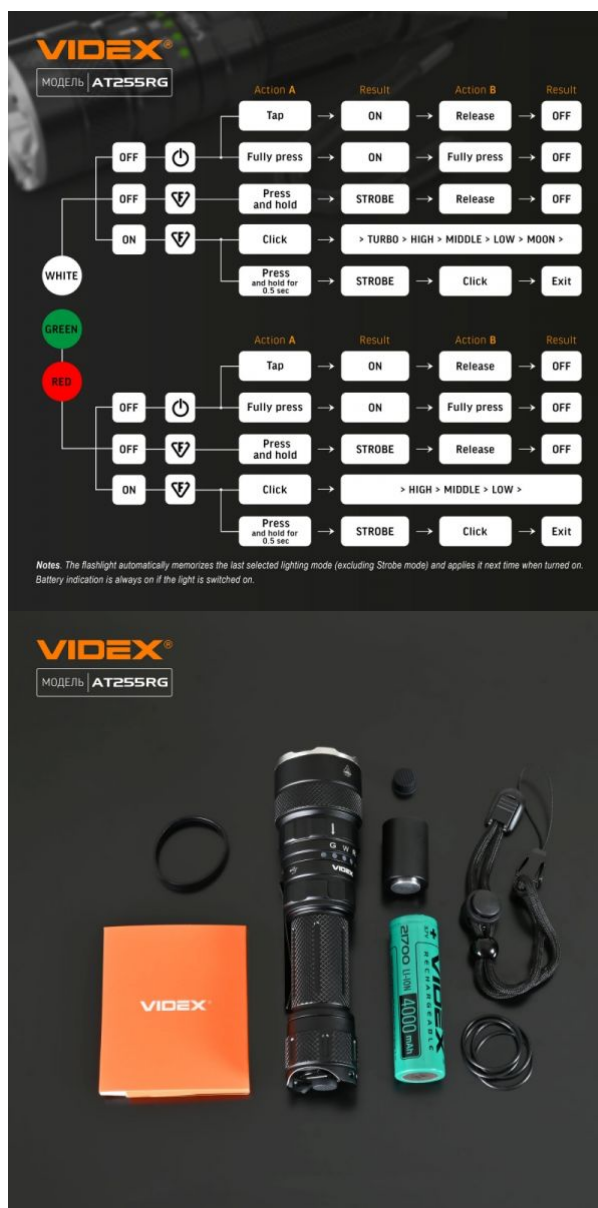

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.



### INDEX: VLF-AT255RG



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



— The protection is effective in case of a fall from a height of up to 2 meters



— The product is incompatible with light regulators



— Operating temperatures range



— The product does not contain mercury



— Class of protection against dust and moisture.  
The product has full protection against dust and prolonged immersion in water at a depth of more than 1 meter