

TECHNICAL CARD



Tactical LED Flashlight

INDEX: VLF-AT255RG



WARRANTY 3 YEARS

General parameters

Operation mode	TURBO, HIGH, MIDDLE, LOW, MOON, STROBE, RED HIGH, RED LOW, RED MIDDLE, GREEN HIGH, GREEN MIDDLE, GREEN LOW
Light source replaceable	no
Battery Warranty	1 year

Type of light source

Dimmable	no
Technology	LED

Electrical parameters

On-mode power (Pon)	20 W
Input interface	USB-C

Photometric parameters

Useful luminous flux of the contained light source (Φuse)	2000 Lm
---	---------

Correlated color temperature	5000K (neutral white), Red, Green
Peak luminous intensity	77600 cd

Additional information

Housing colour	Black
Fall protection	2 m
Operating temperature range	-20° +40°C
Battery type	Li-ion 21700, Li-ion 18650
Battery voltage	3.7 V
Battery capacity	4000 mAh
Battery indicator	5 level
Battery replaceable	yes
Mercury content	Does not contain
Ingress protection	IP68
Housing material	Heavy-anodized aircraft aluminum

Dimensions

EAN	4820246483704
Height	150 mm
Depth	31 mm
In the package	1 pc.
Outer box	20 pcs.
Width	40 mm
Unit nett weight	159g

VIDEX[®]

VIDEX VLF-AT255RG 2000Lm 5000K

INDEX: VLF-AT255RG**Signs marking goods****Packaging marking**

CE, Utilization



VIDEX[®]**VIDEX VLF-AT255RG 2000Lm 5000K****INDEX: VLF-AT255RG**

VIDEX®**VIDEX VLF-AT255RG 2000Lm 5000K****INDEX: VLF-AT255RG**

VIDEX®

VIDEX VLF-AT255RG 2000Lm 5000K

INDEX: VLF-AT255RG

VIDEX®


VIDEX VLF-AT255RG 2000Lm 5000K

INDEX: VLF-AT255RG

VIDEX®

VIDEX VLF-AT255RG 2000Lm 5000K

INDEX: VLF-AT255RG

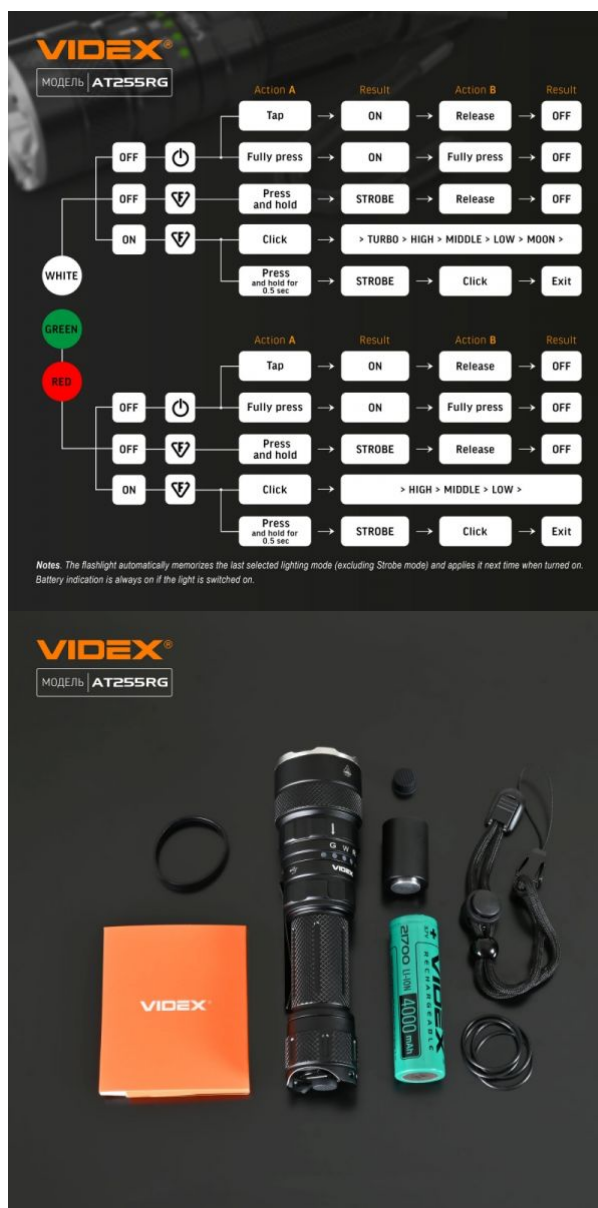

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.

INDEX: VLF-AT255RG



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



— The protection is effective in case of a fall from a height of up to 2 meters



— The product is incompatible with light regulators



— Operating temperatures range



— The product does not contain mercury



— Class of protection against dust and moisture.
The product has full protection against dust and prolonged immersion in water at a depth of more than 1 meter