

## TECHNICAL CARD



Tactical LED Flashlight

**INDEX: VLF-AT255RG**

**WARRANTY 3 YEARS**
**General parameters**

<b>Operation mode</b>	TURBO, HIGH, MIDDLE, LOW, MOON, STROBE, RED HIGH, RED LOW, RED MIDDLE, GREEN HIGH, GREEN MIDDLE, GREEN LOW
<b>Light source replaceable</b>	no

**Type of light source**

<b>Dimmable</b>	no
<b>Technology</b>	LED

**Electrical parameters**

<b>On-mode power (Pon)</b>	20 W
<b>Input interface</b>	USB-C

**Photometric parameters**

<b>Useful luminous flux of the contained light source (Φuse)</b>	2000 Lm
<b>Correlated color temperature</b>	5000K (neutral white), Red, Green

**Peak luminous intensity** 77600 cd

**Additional information**

<b>Housing colour</b>	Black
<b>Fall protection</b>	2 m
<b>Operating temperature range</b>	-20° +40°C
<b>Battery type</b>	Li-ion 21700, Li-ion 18650
<b>Battery voltage</b>	3.7 V
<b>Battery capacity</b>	4000 mAh
<b>Battery indicator</b>	5 level
<b>Battery replaceable</b>	yes
<b>Mercury content</b>	Does not contain
<b>Ingress protection</b>	IP68
<b>Housing material</b>	Heavy-anodized aircraft aluminum

**Dimensions**

<b>EAN</b>	4820246483704
<b>Height</b>	150 mm
<b>Depth</b>	31 mm
<b>Width</b>	40 mm
<b>In the package</b>	1 pc.
<b>Outer box</b>	20 pcs.
<b>Unit nett weight</b>	159g

**Signs marking goods**

<b>Packaging marking</b>	CE, Utilization
--------------------------	-----------------

**VIDEX®**

VIDEX VLF-AT255RG 2000Lm 5000K

**INDEX: VLF-AT255RG**

**VIDEX<sup>®</sup>****VIDEX VLF-AT255RG 2000Lm 5000K****INDEX: VLF-AT255RG**

**VIDEX®****VIDEX VLF-AT255RG 2000Lm 5000K****INDEX: VLF-AT255RG**

# VIDEX®

VIDEX VLF-AT255RG 2000Lm 5000K

INDEX: VLF-AT255RG



**VIDEX®**

VIDEX VLF-AT255RG 2000Lm 5000K


**INDEX: VLF-AT255RG**



# VIDEX®

## VIDEX VLF-AT255RG 2000Lm 5000K

### INDEX: VLF-AT255RG

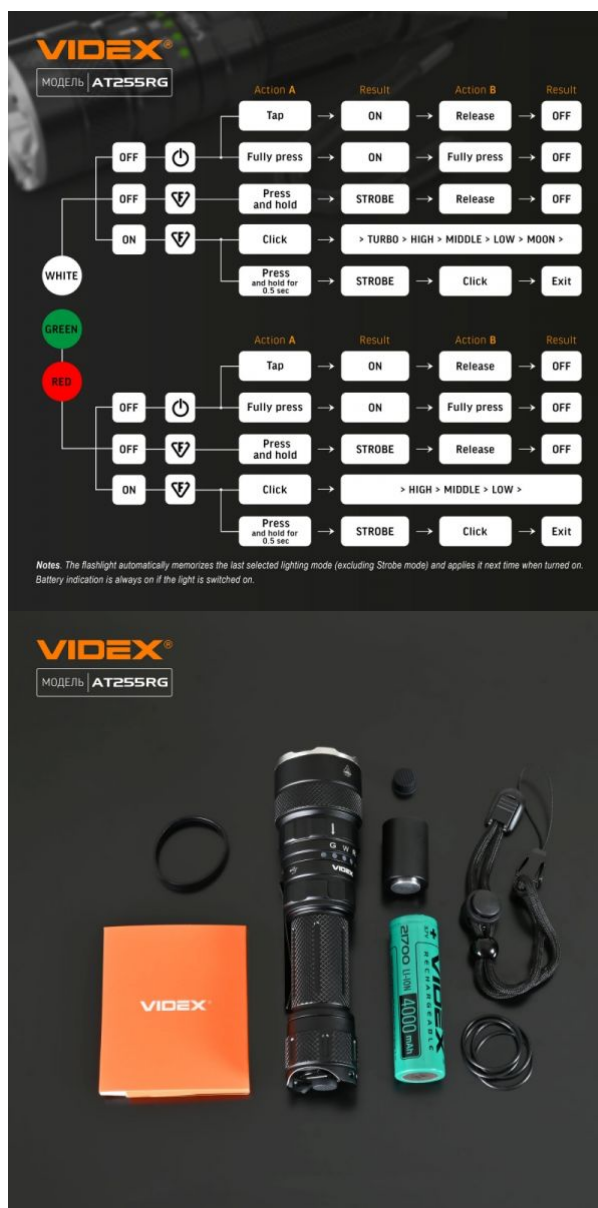

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.



### INDEX: VLF-AT255RG



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



— The protection is effective in case of a fall from a height of up to 2 meters



— The product is incompatible with light regulators



— Operating temperatures range



— The product does not contain mercury



— Class of protection against dust and moisture.  
The product has full protection against dust and prolonged immersion in water at a depth of more than 1 meter