

TECHNICAL CARD



Tactical LED Flashlight

VIDEX®



WARRANTY 3 YEARS



Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutrálno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

General parameters

Light source replaceable no

Type of light source

Dimmable no

Technology LED

Electrical parameters

On-mode power (Pon) 10 W

Input interface USB-C

Photometric parameters

Correlated color temperature 5000K (neutral white)

Useful luminous flux of the contained light source (Φuse) 1000 Lm

Peak luminous intensity 11200 cd

VIDEX VLF-AT366 1000Lm 5000K

INDEX: VLF-AT366

Additional information

Housing colour	Black
Fall protection	2 m
Operating temperature range	-20° +40°C
Battery type	Li-ion 18650
Battery voltage	3.7 V
Battery capacity	2200 mAh
Battery indicator	4 level
Battery replaceable	yes
Mercury content	Does not contain
Ingress protection	IP66
Housing material	Anodized aluminum

Dimensions

EAN	4820246486798
Height	145 mm
Depth	30 mm
Width	30 mm
In the package	1 pc.
Outer box	20 pcs.
Unit nett weight	112g

Signs marking goods

Packaging marking CE, Utilization

VIDEX[®]**VIDEX VLF-AT366 1000Lm 5000K****INDEX: VLF-AT366**

VIDEX®

VIDEX VLF-AT366 1000Lm 5000K

INDEX: VLF-AT366

VIDEX[®]**VIDEX VLF-AT366 1000Lm 5000K****INDEX: VLF-AT366**

VIDEX®

VIDEX VLF-AT366 1000Lm 5000K


INDEX: VLF-AT366



VIDEX[®]

VIDEX VLF-AT366 1000Lm 5000K


INDEX: VLF-AT366

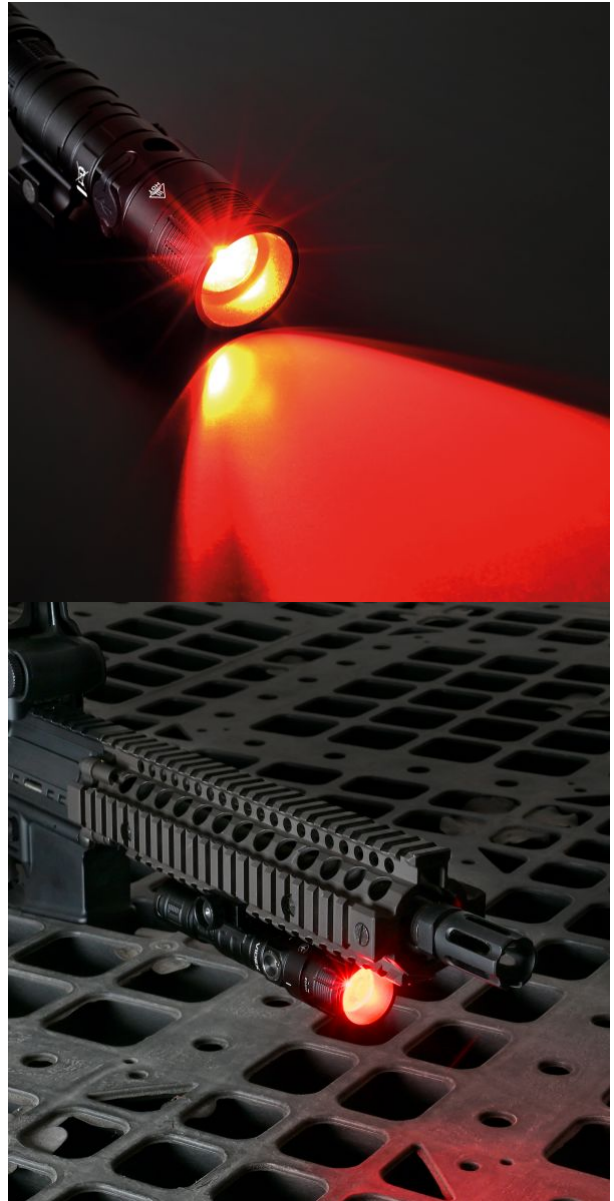

VIDEX®

VIDEX VLF-AT366 1000Lm 5000K

INDEX: VLF-AT366

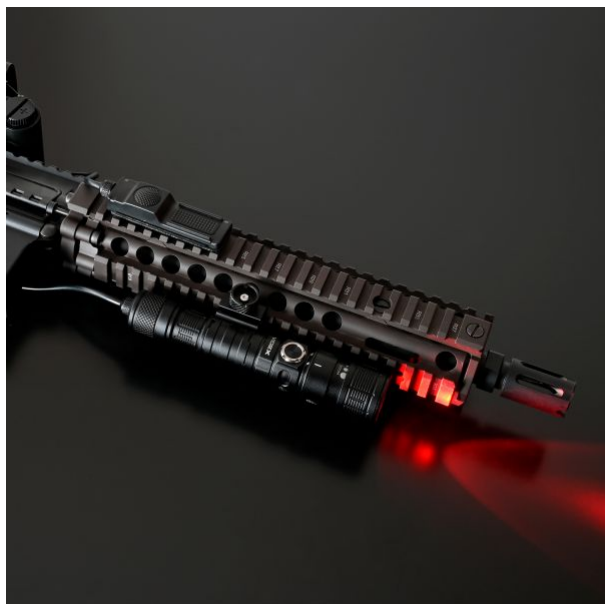

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



— The protection is effective in case of a fall from a height of up to 2 meters



Not Dimmable

— The product is incompatible with light regulators



-20° - +40°C

— Operating temperatures range



Free

— The product does not contain mercury



IP66

— Class of protection against dust and moisture. The product has full protection against dust and powerful water jets

Date: 19.04.2025