

## TECHNICAL CARD



Tactical LED Flashlight

# VIDEX®



## WARRANTY 3 YEARS



Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutrálno bijela / Neutralweiß / Alb neutru / Neutrus balta / Neitrāls balta / Neutraalne valge / Неутрално бяла / Bianco neutro.

### General parameters

Operation mode	HIGH, MOON, STROBE, RED HIGH, RED LOW
Light source replaceable	no

### Type of light source

Dimmable	no
Technology	LED

### Electrical parameters

On-mode power (Pon)	10 W
Input interface	USB-C

### Photometric parameters

Useful luminous flux of the contained light source (Φuse)	1000 Lm
Peak luminous intensity	11200 cd

## VIDEX VLF-AT366 1000Lm 5000K

### INDEX: VLF-AT366

Correlated color temperature	5000K (neutral white)
<b>Additional information</b>	
Housing colour	Black
Fall protection	2 m
Operating temperature range	-20° +40°C
Battery type	Li-ion 18650
Battery voltage	3.7 V
Battery capacity	2200 mAh
Battery indicator	4 level
Battery replaceable	yes
Mercury content	Does not contain
Ingress protection	IP66
Housing material	Anodized aluminum

### Dimensions

EAN	4820246486798
Height	145 mm
Depth	30 mm
Width	30 mm
In the package	1 pc.
Outer box	20 pcs.
Unit nett weight	112g

### Signs marking goods

Packaging marking	CE, Utilization
-------------------	-----------------

**VIDEX<sup>®</sup>****VIDEX VLF-AT366 1000Lm 5000K****INDEX: VLF-AT366**

**VIDEX®****VIDEX VLF-AT366 1000Lm 5000K****INDEX: VLF-AT366**


**VIDEX<sup>®</sup>****VIDEX VLF-AT366 1000Lm 5000K****INDEX: VLF-AT366**

**VIDEX<sup>®</sup>****VIDEX VLF-AT366 1000Lm 5000K****INDEX: VLF-AT366**

# VIDEX®

VIDEX VLF-AT366 1000Lm 5000K


INDEX: VLF-AT366

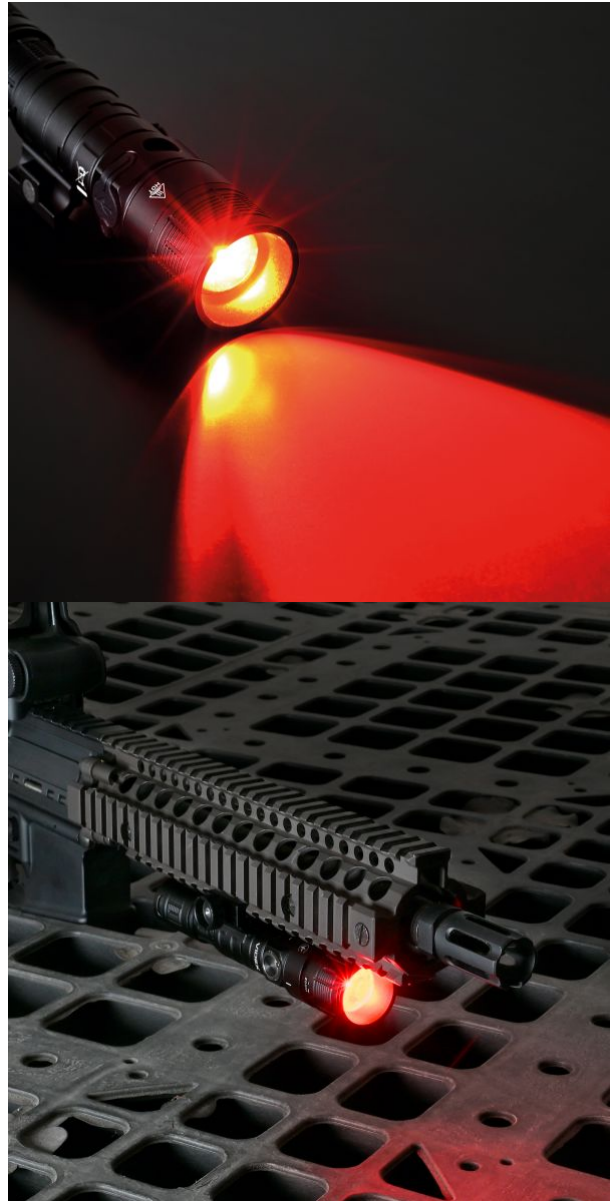

# VIDEX®

## VIDEX VLF-AT366 1000Lm 5000K

### INDEX: VLF-AT366

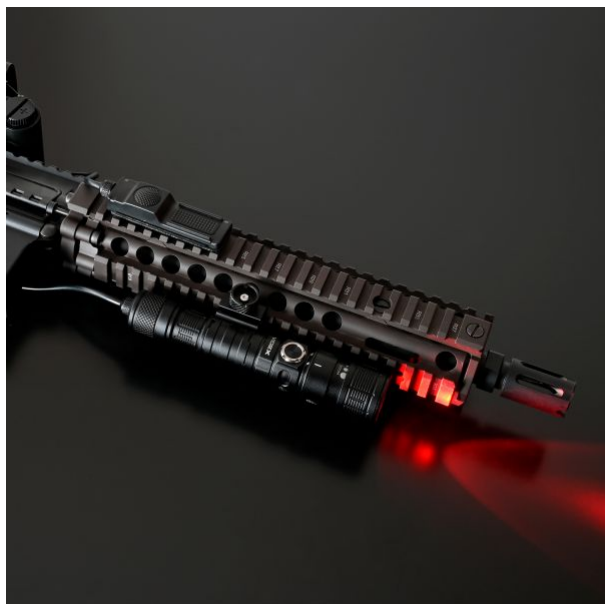

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



— The protection is effective in case of a fall from a height of up to 2 meters



Not Dimmable

— The product is incompatible with light regulators



-20° - +40°C

— Operating temperatures range



Free

— The product does not contain mercury



IP68

— Class of protection against dust and moisture. The product has full protection against dust and powerful water jets

Date: 31.05.2025