

**VIDEX®**

VIDEX VLF-AT366 1000Lm 5000K

**INDEX: VLF-AT366**

## TECHNICAL CARD



Tactical LED Flashlight



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

# VIDEX®



## WARRANTY 3 YEARS



Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutrus balta / Neitrāls balta / Neutraalne valge / Неутрално бяла / Bianco neutro.

### General parameters

**Light source replaceable** no

### Type of light source

**Dimmable** no

**Technology** LED

### Electrical parameters

**On-mode power (Pon)** 10 W

**Input interface** USB-C

### Photometric parameters

**Useful luminous flux of the contained light source (Φ<sub>use</sub>)** 1000 Lm

**Correlated color temperature** 5000K (neutral white)

**Peak luminous intensity** 11200 cd

## VIDEX VLF-AT366 1000Lm 5000K

### INDEX: VLF-AT366

### Additional information

<b>Housing colour</b>	Black
<b>Fall protection</b>	2 m
<b>Operating temperature range</b>	-20° +40°C
<b>Battery type</b>	Li-ion 18650
<b>Battery voltage</b>	3.7 V
<b>Battery capacity</b>	2200 mAh
<b>Battery indicator</b>	4 level
<b>Battery replaceable</b>	yes
<b>Mercury content</b>	Does not contain
<b>Ingress protection</b>	IP66
<b>Housing material</b>	Anodized aluminum

### Dimensions

<b>EAN</b>	4820246486798
<b>Height</b>	145 mm
<b>Depth</b>	30 mm
<b>Width</b>	30 mm
<b>In the package</b>	1 pc.
<b>Outer box</b>	20 pcs.
<b>Unit nett weight</b>	112g

### Signs marking goods

**Packaging marking** CE, Utilization

INDEX: VLF-AT366



**VIDEX<sup>®</sup>**

VIDEX VLF-AT366 1000Lm 5000K

**INDEX: VLF-AT366**

**VIDEX<sup>®</sup>**

VIDEX VLF-AT366 1000Lm 5000K

**INDEX: VLF-AT366**

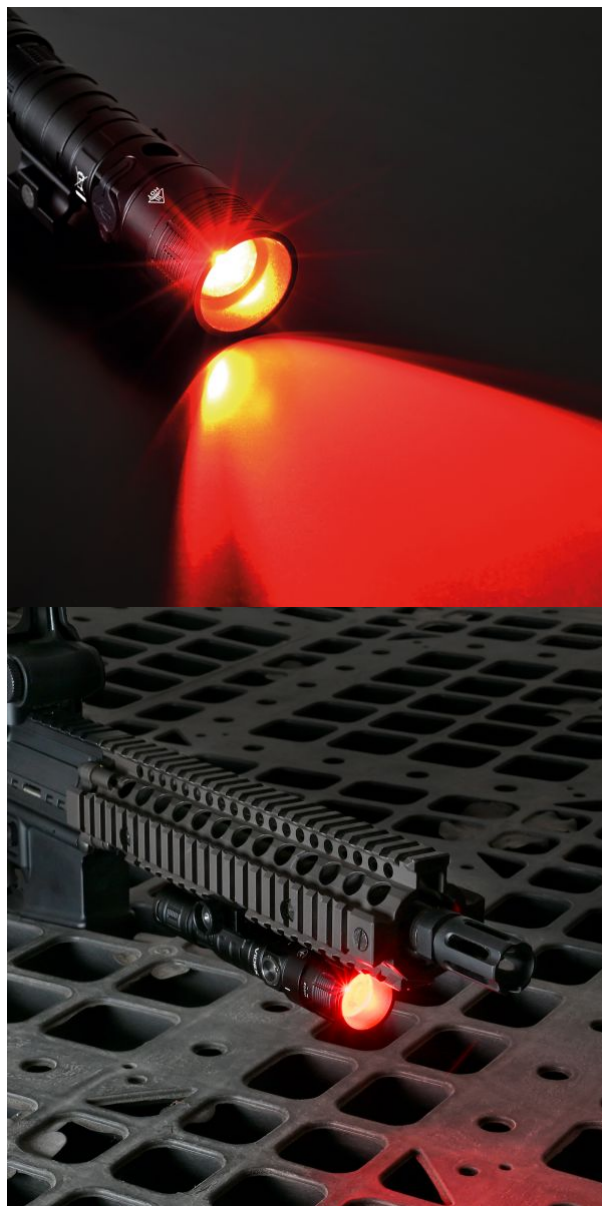
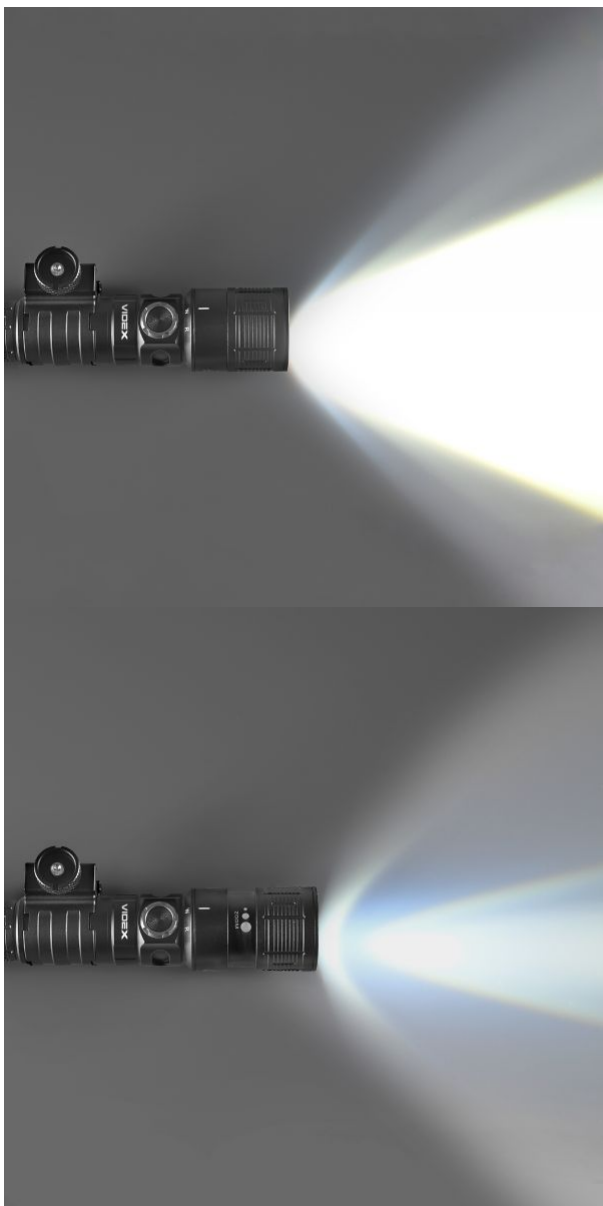
**VIDEX<sup>®</sup>**

VIDEX VLF-AT366 1000Lm 5000K

**INDEX: VLF-AT366**

**VIDEX<sup>®</sup>**

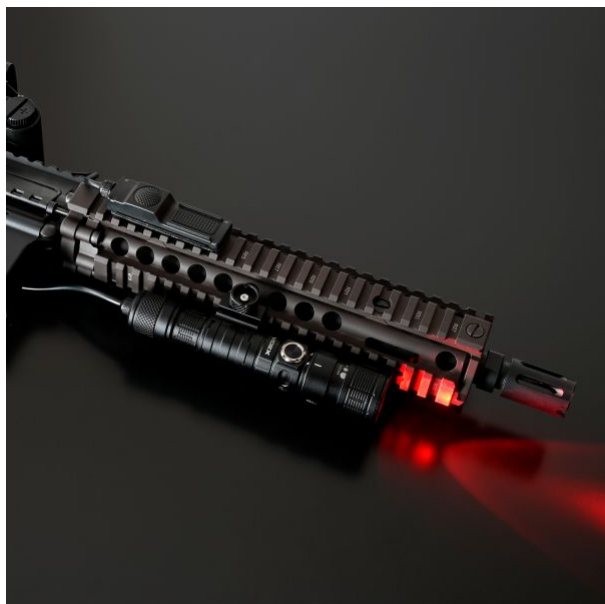
VIDEX VLF-AT366 1000Lm 5000K

**INDEX: VLF-AT366**

# VIDEX®

## VIDEX VLF-AT366 1000Lm 5000K

### INDEX: VLF-AT366



We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



— The protection is effective in case of a fall from a height of up to 2 meters



Not Dimmable

— The product is incompatible with light regulators



-20° - +40°C

— Operating temperatures range



Free

— The product does not contain mercury



IP66

— Class of protection against dust and moisture. The product has full protection against dust and powerful water jets