

TECHNICAL CARD



Universal Battery charger

VIDEX®



Free

WARRANTY 1 YEAR

Electrical parameters

Input interface	Micro USB
Electric shock protection class	II

Additional information

Housing colour	Black
Operating temperature range	0° +35°C
Battery type	Li-ion / IMR
Battery voltage	3.7 V
Mercury content	Does not contain
Housing material	ABS

Dimensions

EAN	4820246483131
Height	100 mm
Depth	28 mm
In the package	1 pc.
Outer box	20 pcs.
Width	60 mm
Unit nett weight	55g

VIDEX VCH-L201


INDEX: VCH-L201

Signs marking goods

Packaging marking

CE, Utilization

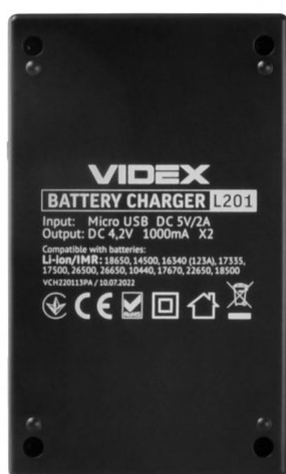

VIDEX[®]**VIDEX VCH-L201****INDEX: VCH-L201**

VIDEX®

VIDEX VCH-L201

INDEX: VCH-L201

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.



Class of protection against electric shock II - provided not only by basic insulation but also by double or reinforced insulation



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



— The product does not contain mercury