

## TECHNICAL CARD



Universal Battery charger

# VIDEX®



Free

## WARRANTY 1 YEAR

### Electrical parameters

|                                 |           |
|---------------------------------|-----------|
| Input interface                 | Micro USB |
| Electric shock protection class | II        |

### Additional information

|                             |                  |
|-----------------------------|------------------|
| Housing colour              | Black            |
| Operating temperature range | 0° +35°C         |
| Battery type                | Li-ion / IMR     |
| Battery voltage             | 3.7 V            |
| Mercury content             | Does not contain |
| Housing material            | ABS              |

### Dimensions

|                  |               |
|------------------|---------------|
| EAN              | 4820246483131 |
| Height           | 100 mm        |
| Depth            | 28 mm         |
| In the package   | 1 pc.         |
| Outer box        | 20 pcs.       |
| Width            | 60 mm         |
| Unit nett weight | 55g           |

VIDEX VCH-L201


INDEX: VCH-L201

### Signs marking goods

Packaging marking

CE, Utilization

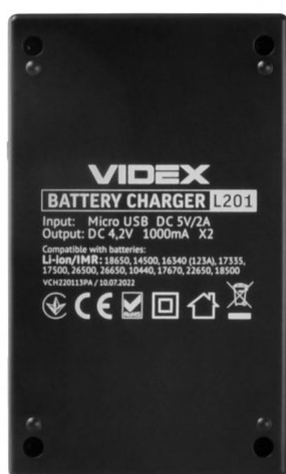

**VIDEX<sup>®</sup>****VIDEX VCH-L201****INDEX: VCH-L201**

# VIDEX®

## VIDEX VCH-L201

### INDEX: VCH-L201

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.



Class of protection against electric shock II - provided not only by basic insulation but also by double or reinforced insulation



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



— The product does not contain mercury