

TECHNICAL CARD



Facade double-sided luminaire



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®



IK07



-25° +50°C



Free



IP54

WARRANTY 2 YEARS

General parameters

Light source replaceable	end user
--------------------------	----------

Electrical parameters

Rated voltage, frequency	AC 220-240 V, 50/60 Hz
--------------------------	------------------------

Input interface	Terminal block
-----------------	----------------

Electric shock protection class	I
---------------------------------	---

Additional information

Place of installation	Wall
-----------------------	------

Place of application	outdoor
----------------------	---------

Housing colour	Gray
----------------	------

Impact protection	IK07
-------------------	------

Operating temperature range	-25° +50°C
-----------------------------	------------

Mercury content	Does not contain
-----------------	------------------

Ingress protection	IP54
--------------------	------

Housing material	Aluminum
------------------	----------

Dimensions

EAN	4820246482363
-----	---------------

Height	300 mm
--------	--------


VIDEX-2XE27-PORTER-GRAY


INDEX: VL-AR082G

Width	108 mm
-------	--------

Depth	165 mm
-------	--------

Outer box	12 pcs.
-----------	---------

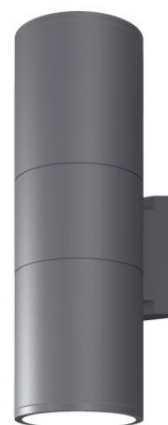

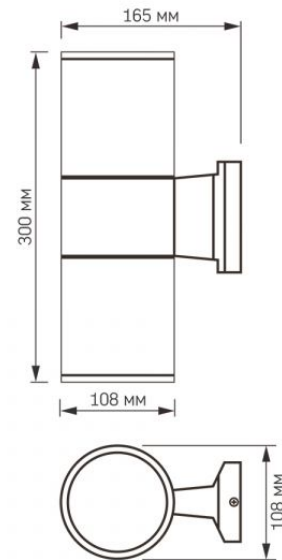VIDEX[®]**VIDEX-2XE27-PORTER-GRAY****INDEX: VL-AR082G**

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.