

TECHNICAL CARD



Facade double-sided luminaire



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®



IK07



-25° +50°C



Free



IP54

WARRANTY 2 YEARS

General parameters

Light source replaceable end user

Electrical parameters

Rated voltage, frequency AC 220-240 V, 50/60 Hz

Input interface Terminal block

Electric shock protection class I

Additional information

Place of installation Wall

Place of application outdoor

Impact protection IK07

Housing colour Gray

Operating temperature range -25° +50°C

Mercury content Does not contain

Ingress protection IP54

Housing material Aluminum

Dimensions

EAN 4820246480901

Outer box 12 pcs.

VIDEX-2XGU10-BRUNO-GRAY

INDEX: VL-AR072G


Height 225 mm

Width 80 mm

Depth 112 mm



INDEX: VL-AR072G

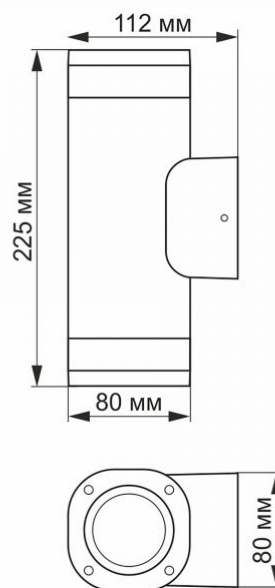

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.



The product must be used outdoors



Protection against electric shock class I. A product in which the means of protection against electric shock, in addition to the main insulation, is an additional protective circuit connected to the grounding of the power supply network



— The product withstands a medium impact (e.g., from a blunt object)



— Operating temperatures range



— The product does not contain mercury



— Class of protection against dust and moisture. The product is protected against the ingress of water and dust particles into the housing