

TECHNICAL CARD



Garden luminaire



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®



360°



Ra ≥ 80



50 000 h

ON/OFF
20 000

IK07



Free



Not Dimmable



-25° +50°C



Free



IP54

WARRANTY 2 YEARS

WARM WHITE



2700K

Warm White / Ciepła biel / Tepla bila / Blanc chaud / Tepla biela / Warm wit / Meleg feher / Topla bela / Topla bijela / Warmweiß / Alb cald / Šiltai balta / Silti balta / Soe valge / Тепло бяла / Bianco caldo.

General parameters

Light source or containing product	Containing product
Control gear replaceable	no
Light source replaceable	no

Type of light source

Dimmable	no
Technology	LED
Energy efficiency class of the contained light source	F

Electrical parameters

On-mode power (Pon)	3 W
Rated voltage, frequency	AC 220-240 V, 50/60 Hz
Rated current	26 mA

VIDEX-3W-LUKAS-SILVER 80CM

INDEX: VL-AR05-03082S

Input interface	Terminal block
Photometric parameters	
Correlated color temperature	2700K (warm white)
Useful luminous flux of the contained light source (Φuse)	300 Lm
Beam angle	360°
Color rendering index (CRI)	Ra > 80
Lifetime	50000 h
On/Off cycles	20000
CRI Min	Ra 80
CRI Max	Ra 88

Additional information

Place of installation	Floor
Place of application	outdoor
Impact protection	IK07
Housing colour	Silver
Ultraviolet radiation	no
Operating temperature range	-25° +50°C
Mercury content	Does not contain
Ingress protection	IP54
Housing material	Stainless Steel

Dimensions

EAN 4820246481083

VIDEX[®]

VIDEX-3W-LUKAS-SILVER 80CM

INDEX: VL-AR05-03082S

Height	800 mm
Width	76 mm
Depth	76 mm
In the package	1 pc.
Outer box	12 pcs.

Signs marking goods

Packaging marking


Recycling of
waste, CE,
Utilization



VIDEX®





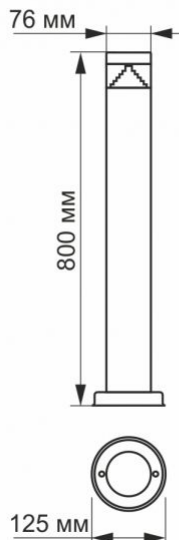









VIDEX-3W-LUKAS-SILVER 80CM

INDEX: VL-AR05-03082S



We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.

-  The product must be used outdoors
-  Waste recycling after the end of the product's service life
-  The product meets the requirements of EU directives
-  It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste
-  — Rated beam angle
360°
-  — Ra > 80 - color rendering index
Ra ≥ 80
-  — Nominal lifetime (hours)
50 000 h
-  — Rated On/off cycles
20 000
-  — The product withstands a medium impact (e.g., from a blunt object)
IK07
-  — The product does not emit ultraviolet light
Free
-  — The product is incompatible with light regulators
Not Dimmable
-  — Operating temperatures range
-25° +50°C
-  — The product does not contain mercury
Free
-  — Class of protection against dust and moisture. The product is protected against the ingress of water and dust particles into the housing
IP54