

## TECHNICAL CARD



Garden luminaire




Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

# VIDEX®

## VIDEX-3W-LUKAS-SILVER 80CM

### INDEX: VL-AR05-03082S

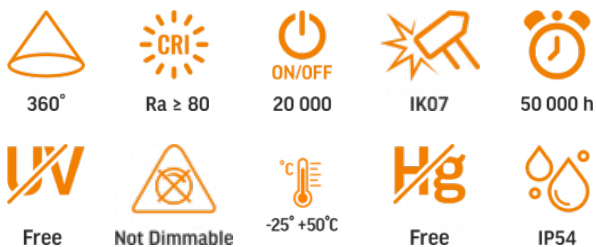

## WARRANTY 2 YEARS

### WARM WHITE



### 2700K

Warm White / Ciepła biel / Tepla bila / Blanc chaud / Tepla biela / Warm wit / Meleg feher / Topla bela / Topla bijela / Warmweiß / Alb cald / Šiltai balta / Silti balta / Soe valge / Тепло бяла / Bianco caldo.

## General parameters

Light source or containing product	Containing product
Control gear replaceable	no
Light source replaceable	no

## Type of light source

Energy efficiency class of the contained light source	F
Dimmable	no
Technology	LED

## Electrical parameters

On-mode power (Pon)	3 W
Rated voltage, frequency	AC 220-240 V, 50/60 Hz
Rated current	26 mA

Input interface	Terminal block
<b>Photometric parameters</b>	
Useful luminous flux of the contained light source (Φuse)	300 Lm
Correlated color temperature	2700K (warm white)
Beam angle	360°
Color rendering index (CRI)	Ra > 80
On/Off cycles	20000
Lifetime (L70B50)	50000 h
CRI Min	Ra 80
CRI Max	Ra 88

## Additional information

Place of installation	Floor
Place of application	outdoor
Impact protection	IK07
Housing colour	Silver
Ultraviolet radiation	no
Operating temperature range	-25° +50°C
Mercury content	Does not contain
Ingress protection	IP54
Housing material	Stainless Steel

## Dimensions

EAN 4820246481083

**VIDEX**<sup>®</sup>


VIDEX-3W-LUKAS-SILVER 80CM

INDEX: VL-AR05-03082S

<b>In the package</b>	1 pc.
<b>Height</b>	800 mm
<b>Outer box</b>	12 pcs.
<b>Width</b>	76 mm
<b>Depth</b>	76 mm





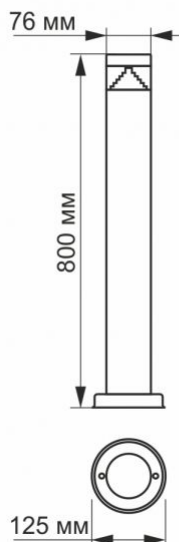









**Signs marking goods****Packaging marking**Recycling of  
waste, CE,  
Utilization

### INDEX: VL-AR05-03082S



We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.

	The product must be used outdoors
	Waste recycling after the end of the product's service life
	The product meets the requirements of EU directives
	It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste
	— Rated beam angle 360°
	— Ra > 80 - color rendering index Ra ≥ 80
	— Rated On/off cycles 20 000
	— The product withstands a medium impact (e.g., from a blunt object) IK07
	— Nominal lifetime (hours) 50 000 h
	— The product does not emit ultraviolet light Free
	— The product is incompatible with light regulators Not Dimmable
	— Operating temperatures range -25° +50°C
	— The product does not contain mercury Free
	— Class of protection against dust and moisture. The product is protected against the ingress of water and dust particles into the housing IP54