


## TECHNICAL CARD



Garden luminaire



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

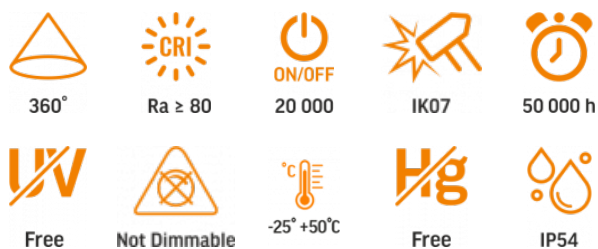

## WARRANTY 2 YEARS

### WARM WHITE



Warm White / Ciepta biel / Tepla bila / Blanc chaud / Tepla biela / Warm wit / Meleg feher / Topla bela / Topla bijela / Warmweiß / Alb cald / Šiltai balta / Silti balta / Soe valge / Тепло бяла / Bianco caldo.

### General parameters

Light source or containing product	Containing product
Control gear replaceable	no
Light source replaceable	no

### Type of light source

Dimmable	no
Technology	LED
Energy efficiency class of the contained light source	F

### Electrical parameters

On-mode power (Pon)	3 W
Rated voltage, frequency	AC 220-240 V, 50/60 Hz
Rated current	26 mA

### Input interface

Terminal block

### Photometric parameters

Useful luminous flux of the contained light source (Φuse)	300 Lm
Correlated color temperature	2700K (warm white)
Beam angle	360°
Color rendering index (CRI)	Ra > 80
On/Off cycles	20000
Lifetime (L70B50)	50000 h
CRI Min	Ra 80
CRI Max	Ra 88

### Additional information

Place of installation	Floor
Place of application	outdoor
Impact protection	IK07
Housing colour	Silver
Ultraviolet radiation	no
Operating temperature range	-25° +50°C
Mercury content	Does not contain
Ingress protection	IP54
Housing material	Stainless Steel

### Dimensions

EAN	4820246481083
-----	---------------

**VIDEX®****VIDEX-3W-LUKAS-SILVER 80CM****INDEX: VL-AR05-03082S**


<b>Height</b>	800 mm
<b>Depth</b>	76 mm
<b>In the package</b>	1 pc.
<b>Outer box</b>	12 pcs.
<b>Width</b>	76 mm

### Signs marking goods

#### Packaging marking

Recycling of  
waste, CE,  
Utilization

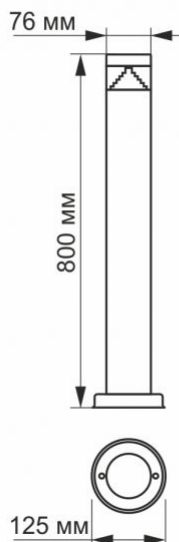

**INDEX: VL-AR05-03082S**


We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.



The product must be used outdoors



Waste recycling after the end of the product's service life



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



360°

Rated beam angle



Ra ≥ 80

Ra > 80 - color rendering index



20 000

Rated On/off cycles



IK07

The product withstands a medium impact (e.g., from a blunt object)



50 000 h

Nominal lifetime (hours)



Free

The product does not emit ultraviolet light



Not Dimmable

The product is incompatible with light regulators



-25° +50°C

Operating temperatures range



Free

The product does not contain mercury



IP54

Class of protection against dust and moisture. The product is protected against the ingress of water and dust particles into the housing