

## TECHNICAL CARD



Facade luminaire



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

# VIDEX®



120°



Ra ≥ 80



ON/OFF

20 000



50 000 h



Free



Not Dimmable



-20° +40°C



Free



IP54

## WARRANTY 3 YEARS

### WARM WHITE



### 2700K

Warm White / Ciepła biel / Tepla bila / Blanc chaud / Tepla biela / Warm wit / Meleg feher / Topla bela / Topla bijela / Warmweiß / Alb cald / Šiltai balta / Silti balta / Soe valge / Тепло бяла / Bianco caldo.

## General parameters

|                                    |                    |
|------------------------------------|--------------------|
| Light source or containing product | Containing product |
| Control gear replaceable           | no                 |
| Light source replaceable           | no                 |

## Type of light source

|   |     |
|---|-----|
| Dimmable  | no  |
| Technology  | LED |
| Energy efficiency class of the contained light source | F   |

## Electrical parameters

|                          |                        |
|--------------------------|------------------------|
| On-mode power (Pon)      | 3 W                    |
| Rated voltage, frequency | AC 220-240 V, 50/60 Hz |
| Rated current            | 26 mA                  |

## VIDEX-3W-PELLE-BLACK

### INDEX: VL-AR031-032B

|   |                    |
|---|--------------------|
| Input interface   | Terminal block     |
| <b>Photometric parameters</b>                             |                    |
| Useful luminous flux of the contained light source (Φuse) | 270 Lm             |
| Correlated color temperature                              | 2700K (warm white) |
| Beam angle  | 120°               |
| Color rendering index (CRI)                               | Ra > 80            |
| On/Off cycles   | 20000              |
| Lifetime  | 50000 h            |
| CRI Min   | Ra 80              |
| CRI Max   | Ra 88              |

## Additional information

|                             |                  |
|-----------------------------|------------------|
| Place of installation       | Wall             |
| Place of application        | outdoor          |
| Housing colour              | Black            |
| Ultraviolet radiation       | no               |
| Operating temperature range | -20° +40°C       |
| Mercury content             | Does not contain |
| Ingress protection          | IP54             |
| Housing material            | Aluminum         |

## Dimensions

|        |               |
|--------|---------------|
| EAN    | 4820246480857 |
| Height | 81 mm         |

**VIDEX**<sup>®</sup>


VIDEX-3W-PELLE-BLACK

**INDEX: VL-AR031-032B**

|                       |         |
|-----------------------|---------|
| <b>Depth</b>          | 92 mm   |
| <b>Width</b>          | 68 mm   |
| <b>In the package</b> | 1 pc.   |
| <b>Outer box</b>      | 20 pcs. |





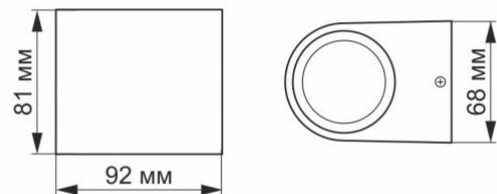








**Signs marking goods****Packaging marking**

Recycling of  
waste, CE,  
Utilization



We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.

-  The product must be used outdoors
-  Waste recycling after the end of the product's service life
-  The product meets the requirements of EU directives
-  It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste
-  — Rated beam angle  
120°
-  — Ra > 80 - color rendering index  
Ra ≥ 80
-  — Rated On/off cycles  
ON/OFF  
20 000
-  — Nominal lifetime (hours)  
50 000 h
-  — The product does not emit ultraviolet light  
Free
-  — The product is incompatible with light regulators  
Not Dimmable
-  — Operating temperatures range  
-20° -40°C
-  — The product does not contain mercury  
Free
-  — Class of protection against dust and moisture.  
The product is protected against the ingress of water and dust particles into the housing  
IP54