

TECHNICAL CARD



Facade luminaire



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®

VIDEX-3W-PELLE-BLACK

INDEX: VL-AR031-032B



120°



Ra ≥ 80



20 000



50 000 h



Free



Not Dimmable



-20° +40°C



Free



IP54

WARRANTY 3 YEARS

WARM WHITE



2700K

Warm White / Ciepła biel / Tepla bila / Blanc chaud / Tepla biela / Warm wit / Meleg feher / Topla bela / Topla bijela / Warmweiß / Alb cald / Šiltai balta / Silti balta / Soe valge / Toplo бяла / Bianco caldo.

General parameters

Light source or containing product	Containing product
Light source replaceable	no
Control gear replaceable	no

Type of light source

Energy efficiency class of the contained light source	F
Dimmable	no
Technology	LED

Electrical parameters

On-mode power (Pon)	3 W
Rated voltage, frequency	AC 220-240 V, 50/60 Hz
Rated current	26 mA

Input interface

Terminal block

Photometric parameters

Useful luminous flux of the contained light source (Φuse)	270 Lm
Correlated color temperature	2700K (warm white)
Beam angle	120°
Color rendering index (CRI)	Ra > 80
On/Off cycles	20000
Lifetime (L70B50)	50000 h
CRI Min	Ra 80
CRI Max	Ra 88

Additional information

Place of installation	Wall
Place of application	outdoor
Housing colour	Black
Ultraviolet radiation	no
Operating temperature range	-20° +40°C
Mercury content	Does not contain
Ingress protection	IP54
Housing material	Aluminum

Dimensions


EAN	4820246480857
In the package	1 pc.

VIDEX®**VIDEX-3W-PELLE-BLACK****INDEX: VL-AR031-032B**

Height	81 mm
Outer box	20 pcs.
Width	68 mm
Depth	92 mm





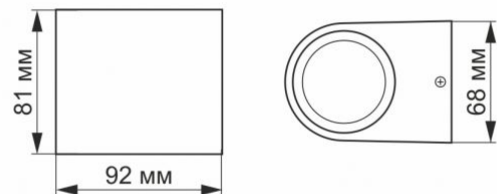








Signs marking goods**Packaging marking**

Recycling of
waste, CE,
Utilization



We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.

-  The product must be used outdoors
-  Waste recycling after the end of the product's service life
-  The product meets the requirements of EU directives
-  It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste
-  — Rated beam angle
120°
-  — Ra > 80 - color rendering index
Ra ≥ 80
-  — Rated On/off cycles
ON/OFF
20 000
-  — Nominal lifetime (hours)
50 000 h
-  — The product does not emit ultraviolet light
Free
-  — The product is incompatible with light regulators
Not Dimmable
-  — Operating temperatures range
-20° -40°C
-  — The product does not contain mercury
Free
-  — Class of protection against dust and moisture.
The product is protected against the ingress of water and dust particles into the housing
IP54