

## TECHNICAL CARD



Facade double-sided luminaire



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

# VIDEX®



## WARRANTY 3 YEARS

### WARM WHITE



### 2700K

Warm White / Ciepła biel / Tepla bila / Blanc chaud / Tepla biela / Warm wit / Meleg feher / Topla bela / Topla bijela / Warmweiß / Alb cald / Šiltai balta / Silti balta / Soe valge / Тепло бяла / Bianco caldo.

### General parameters

Light source or containing product	Containing product
Light source replaceable	no
Control gear replaceable	no

### Type of light source

Energy efficiency class of the contained light source	F
Dimmable	no
Technology	LED

### Electrical parameters

On-mode power (Pon)	6 W
---------------------	-----

## VIDEX-6W-ERIC-BLACK

### INDEX: VL-AR04-062B

Rated voltage, frequency	AC 220-240 V, 50/60 Hz
Rated current	55 mA
Input interface	Terminal block
Electric shock protection class	I
Energy consumption in on-mode of the light source (kWh/1000h)	6

### Photometric parameters

Useful luminous flux of the contained light source (Φuse)	580 Lm
Correlated color temperature	2700K (warm white)
Beam angle	120°
Color rendering index (CRI)	Ra > 80
On/Off cycles	25000
Lifetime (L70B50)	50000 h
Useful luminous flux of the light source reference	in a sphere (360°)
Colour consistency in MacAdam ellipses (SDCM)	<6 (2700K)
CRI Min	Ra 80
CRI Max	Ra 88

### Additional information

Place of installation	Wall
Place of application	indoor, outdoor
Impact protection	IK07
Housing colour	Black

**VIDEX®**

VIDEX-6W-ERIC-BLACK

INDEX: VL-AR04-062B

Ultraviolet radiation	no
Operating temperature range	-25° +50°C
Suitable for installation in normally flammable surfaces	yes
Mercury content	Does not contain
Ingress protection	IP54
Housing material	Aluminum

### Dimensions

EAN	4820246480871
In the package	1 pc.
Outer box	20 pcs.
Height	100 mm
Width	100 mm
Depth	105 mm
Unit nett weight	550g


### Signs marking goods

Packaging marking	CE, Utilization
-------------------	-----------------




**VIDEX<sup>®</sup>**

VIDEX-6W-ERIC-BLACK

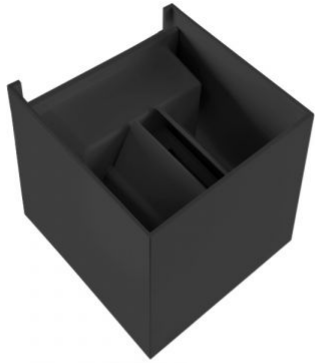



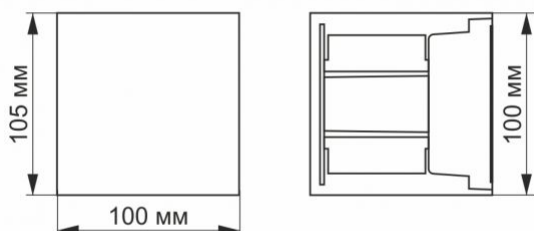












**INDEX: VL-AR04-062B**

### INDEX: VL-AR04-062B



We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.

-  The product must be used indoors
-  The product must be used outdoors
-  Protection against electric shock class I. A product in which the means of protection against electric shock, in addition to the main insulation, is an additional protective circuit connected to the grounding of the power supply network
-  The product can be installed and used in/on normally flammable surfaces
-  The product meets the requirements of EU directives
-  It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste
-  — Rated beam angle  
120°
-  — Ra > 80 - color rendering index
-  — Rated On/off cycles  
ON/OFF 25 000
-  — The product withstands a medium impact (e.g., from a blunt object)  
IK07
-  — Nominal lifetime (hours)  
50 000 h
-  — The product does not emit ultraviolet light  
Free
-  — The product is incompatible with light regulators  
Not Dimmable
-  — Operating temperatures range  
-35° +50°C
-  — Colour consistency in MacAdam ellipses (SDCM)  
+5 MacAdam  
CCT 2700K
-  — The product does not contain mercury  
Free
-  — Class of protection against dust and moisture. The product is protected against the ingress of water and dust particles into the housing  
IP54