

TECHNICAL CARD




Facade double-sided luminaire



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®

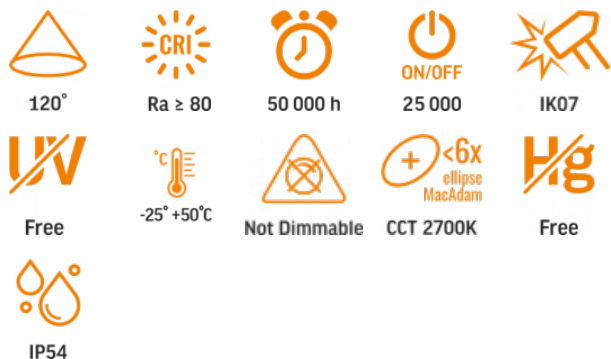

WARRANTY 2 YEARS

WARM WHITE



2700K

Warm White / Ciepła biel / Tepla bila / Blanc chaud / Tepla biela / Warm wit / Meleg feher / Topla bela / Topla bijela / Warmweiß / Alb cald / Siltai balta / Silti balta / Soe valge / Тепло бяла / Bianco caldo.

General parameters

Control gear replaceable	no
Light source replaceable	no

Type of light source

Energy class of the light source	F
Dimmable	no
Technology	LED

Electrical parameters

On-mode power (P _{on})	6 W
Rated voltage, frequency	AC 220-240 V, 50/60 Hz
Rated current	55 mA

VIDEX-6W-ERIC-WHITE

INDEX: VL-AR04-062W

Input interface	Terminal block
Electric shock protection class	I
Energy consumption in on-mode of the light source (kWh/1000h)	6

Photometric parameters

Useful luminous flux of the light source (Φ _{use})	580 Lm
Correlated color temperature	2700K (warm white)
Beam angle	120°
Color rendering index (CRI)	Ra > 80
Lifetime	50000 h
On/Off cycles	25000
Useful luminous flux of the light source reference	in a sphere (360°)
Colour consistency in MacAdam ellipses (SDCM)	<6 (2700K)
CRI Min	Ra 80
CRI Max	Ra 88

Additional information

Place of installation	Wall
Place of application	indoor, outdoor
Impact protection	IK07
Housing colour	White
Ultraviolet radiation	no
Operating temperature range	-25° +50°C

VIDEX®

VIDEX-6W-ERIC-WHITE

INDEX: VL-AR04-062W

Suitable for installation in normally flammable surfaces	yes
Mercury content	Does not contain
Ingress protection	IP54
Housing material	Aluminum

Dimensions

EAN	4820246480888
Height	100 mm
Width	100 mm
Depth	105 mm
In the package	1 pc.
Outer box	20 pcs.
Unit nett weight	550g

Signs marking goods

Packaging marking	CE, Utilization
--------------------------	-----------------



VIDEX®

VIDEX-6W-ERIC-WHITE

INDEX: VL-AR04-062W

VIDEX[®]

VIDEX-6W-ERIC-WHITE

INDEX: VL-AR04-062W

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.

