

INDEX: VL-AR04-062W

TECHNICAL CARD



Facade double-sided luminaire















INDEX: VL-AR04-062W











50 000 h











Free



WARRANTY 2 YEARS



Warm White / Ciepta biel / Tepla bila / Blanc chaud / Tepla biela / Warm wit / Meleg feher / Topla bela / Topla bijela / WarmweiB / Alb cald / Šiltai balta / Silti balta / Soe valge / Топло бяла / Bianco caldo.

General parameters

Light source or containing product	Containing product
Control gear replaceable	no
Light source replaceable	no

Type of light source

Dimmable	no
Technology	LED
Energy efficiency class of the contained light source	F

Electrical parameters

On-mode power (Pon)	6 W

Rated voltage, frequency	AC 220-240 V, 50/60 Hz
Rated current	55 mA
Input interface	Terminal block
Electric shock protection class	I
Energy consumption in on-mode of the light source (kWh/1000h)	6

Photometric parameters

Useful luminous flux of the contained light source (Фuse)	580 Lm
Correlated color temperature	2700K (warm white)
Beam angle	120°
Color rendering index (CRI)	Ra > 80
On/Off cycles	25000
Lifetime (L70B50)	50000 h
Useful luminous flux of the light source reference	in a sphere (360°)
Colour consistency in MacAdam ellipses (SDCM)	<6 (2700K)
CRI Min	Ra 80
CRI Max	Ra 88

Additional information

Place of installation	Wall
Place of application	indoor, outdoor
Impact protection	IK07
Housing colour	White



INDEX: VL-AR04-062W

Ultraviolet radiation	no
Operating temperature range	-25° +50°C
Suitable for installation in normally flammable surfaces	yes
Mercury content	Does not contain
Ingress protection	IP54
Housing material	Aluminum

Dimensions

EAN	4820246480888
In the package	1 pc.
Outer box	20 pcs.
Height	100 mm
Width	100 mm
Depth	105 mm
Unit nett weight	550g

Signs marking goods


Packaging marking	CE, Utilization
-------------------	-----------------








INDEX: VL-AR04-062W

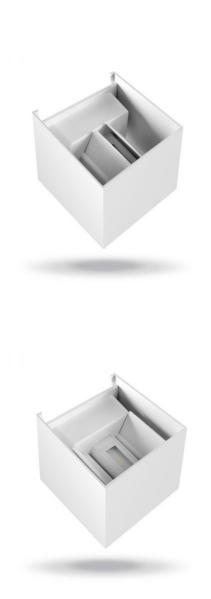





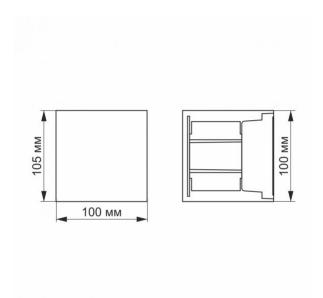

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11, 30-732 Krakow, Poland.

VIDEX-6W-ERIC-WHITE

INDEX: VL-AR04-062W



The product must be used indoors



The product must be used outdoors



Protection against electric shock class I. A product in which the means of protection against electric shock, in addition to the main insulation, is an additional protective circuit connected to the grounding of the power



The product can be installed and used in/on normally flammable



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste $\,$



Rated beam angle



Ra > 80 - color rendering index



Rated On/off cycles



The product withstands a medium impact (e.g., from a blunt object)



Nominal lifetime (hours)



The product does not emit ultraviolet light



The product is incompatible with light regulators



Operating temperatures range



Colour consistency in MacAdam ellipses (SDCM)

l/g

The product does not contain mercury



Class of protection against dust and moisture. The product is protected against the ingress of water and dust particles into the housing

Date: 18.11.2025