

TECHNICAL CARD



Facade double-sided luminaire



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®



120°



Ra ≥ 80



50 000 h

ON/OFF
20 000

Free



Not Dimmable



Free



IP54

WARRANTY 3 YEARS

WARM WHITE



2700K

Warm White / Ciepła biel / Tepla bila / Blanc chaud /
Tepla biela / Warm wit / Meleg feher / Topla bela / Topla
bijela / Warmweiß / Alb cald / Šiltai balta / Silti balta / Soe
valge / Тепло бяла / Bianco caldo.

General parameters

Control gear replaceable	no
--------------------------	----

Light source replaceable	no
--------------------------	----

Type of light source

Energy class of the light source	F
----------------------------------	---

Dimmable	no
----------	----

Electrical parameters

On-mode power (Pon)	6 W
---------------------	-----

Rated voltage, frequency	AC 220-240 V, 50/60 Hz
--------------------------	---------------------------

Rated current	42 mA
---------------	-------

Input interface	Terminal block
-----------------	-------------------

Photometric parameters

VIDEX-6W-ERIC-WHITE

INDEX: VL-AR04-062W

Useful luminous flux of the light source (Φuse)	520 Lm
---	--------

Correlated color temperature	2700K (warm white)
------------------------------	-----------------------

Beam angle	120°
------------	------

Color rendering index (CRI)	Ra > 80
-----------------------------	---------

Lifetime	50000 h
----------	---------

On/Off cycles	20000
---------------	-------

Additional information

Place of installation	Wall
-----------------------	------

Place of application	indoor, outdoor
----------------------	--------------------

Housing colour	White
----------------	-------

Ultraviolet radiation	no
-----------------------	----

Operating temperature range	-20° +40°C
-----------------------------	------------

Mercury content	Does not contain
-----------------	---------------------

Ingress protection	IP54
--------------------	------

Housing material	Aluminum
------------------	----------

Dimensions

EAN	4820246480888
-----	---------------

Height	100 mm
--------	--------

Width	100 mm
-------	--------

Depth	105 mm
-------	--------

Outer box	20 pcs.
-----------	---------

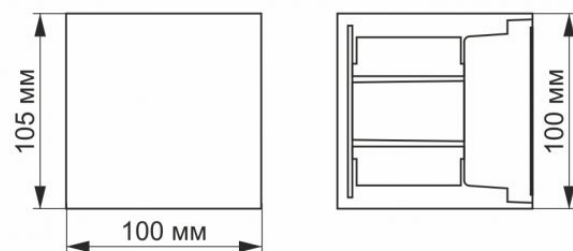
VIDEX®

VIDEX-6W-ERIC-WHITE

INDEX: VL-AR04-062W

VIDEX[®]

VIDEX-6W-ERIC-WHITE

INDEX: VL-AR04-062W

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.

