

## TECHNICAL CARD




Facade double-sided luminaire




Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

# VIDEX®

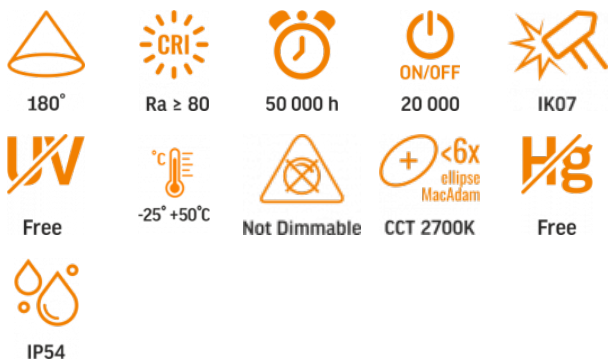

## WARRANTY 2 YEARS

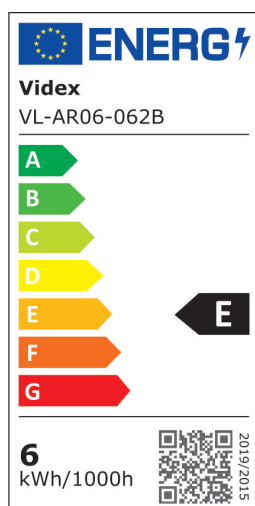

WARM WHITE



2700K

Warm White / Ciepła biel / Tepla bila / Blanc chaud / Tepla biela / Warm wit / Meleg feher / Topla bela / Topla bijela / Warmweiß / Alb cald / Siltai balta / Silti balta / Soe valge / Тепло бяла / Bianco caldo.

LED architectural luminaire - used for architectural lighting of facades of buildings, structures, fences, balconies, terraces, etc. It has a high degree of resistance to external influences, a wide range of operating temperature and voltage. After installation, it does not require maintenance during the entire period of operation. Long-lasting, has a high degree of protection against the negative effects of the external environment. The

## VIDEX-6W-EVAN-BLACK

### INDEX: VL-AR06-062B

luminaire has high impact protection and a high degree of dust and moisture protection.

### General parameters

Control gear replaceable	no
Light source replaceable	no

### Type of light source

Energy class of the light source	E
Dimmable	no
Technology	LED

### Electrical parameters

On-mode power (P <sub>on</sub> )	6 W
Rated voltage, frequency	AC 220-240 V, 50/60 Hz
Rated current	42 mA
Input interface	Terminal block
Electric shock protection class	I
Energy consumption in on-mode of the light source (kWh/1000h)	6

### Photometric parameters

Useful luminous flux of the light source (Φ <sub>use</sub> )	660 Lm
Correlated color temperature	2700K (warm white)
Beam angle	180°
Color rendering index (CRI)	Ra > 80
Lifetime	50000 h

## INDEX: VL-AR06-062B

On/Off cycles	20000
Useful luminous flux of the light source reference	in a sphere (360°)
Colour consistency in MacAdam ellipses (SDCM)	<6 (2700K)
CRI Min	Ra 80
CRI Max	Ra 88

Unit nett weight 300g

## Signs marking goods

Packaging marking CE, Utilization


## Additional information

Place of installation	Wall
Place of application	indoor, outdoor
Impact protection	IK07
Housing colour	Black
Ultraviolet radiation	no
Operating temperature range	-25° +50°C
Suitable for installation in normally flammable surfaces	yes
Mercury content	Does not contain
Ingress protection	IP54
Housing material	Aluminum

## Dimensions

EAN	4820246480918
Height	106 mm
Width	115 mm
Depth	30 mm
In the package	1 pc.
Outer box	20 pcs.

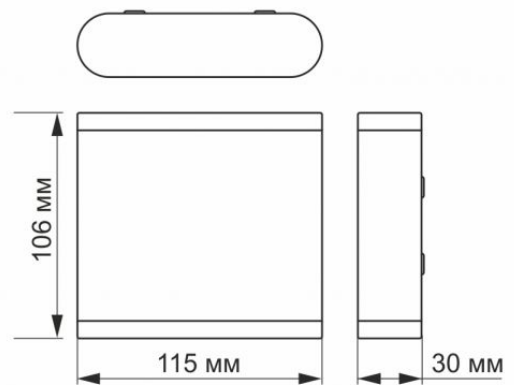

**VIDEX<sup>®</sup>****VIDEX-6W-EVAN-BLACK****INDEX: VL-AR06-062B**

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.