

VIDEX®

VIDEX-6W-PELLE-BLACK

INDEX: VL-AR032-062B

TECHNICAL CARD




Facade double-sided luminaire



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®

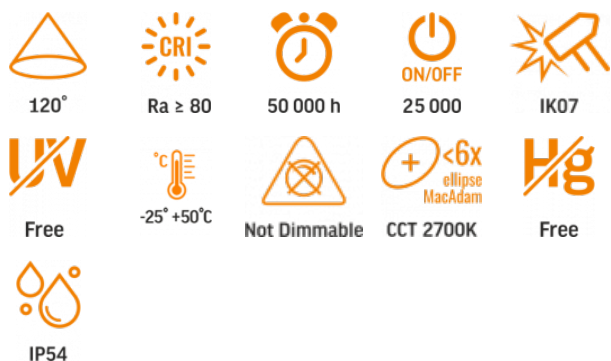

WARRANTY 3 YEARS

WARM WHITE



2700K

Warm White / Ciepła biel / Tepla bila / Blanc chaud / Tepla biela / Warm wit / Meleg feher / Topla bela / Topla bijela / Warmweiß / Alb cald / Siltai balta / Silti balta / Soe valge / Тепло бяла / Bianco caldo.

General parameters

| | |
|--------------------------|----|
| Control gear replaceable | no |
| Light source replaceable | no |

Type of light source

| | |
|----------------------------------|-----|
| Energy class of the light source | F |
| Dimmable | no |
| Technology | LED |

Electrical parameters

| | |
|--------------------------|------------------------|
| On-mode power (Pon) | 6 W |
| Rated voltage, frequency | AC 220-240 V, 50/60 Hz |
| Rated current | 55 mA |

VIDEX-6W-PELLE-BLACK

INDEX: VL-AR032-062B

| | |
|---|----------------|
| Input interface | Terminal block |
| Electric shock protection class | I |
| Energy consumption in on-mode of the light source (kWh/1000h) | 6 |

Photometric parameters

| | |
|--|--------------------|
| Useful luminous flux of the light source (Φuse) | 600 Lm |
| Correlated color temperature | 2700K (warm white) |
| Beam angle | 120° |
| Color rendering index (CRI) | Ra > 80 |
| Lifetime | 50000 h |
| On/Off cycles | 25000 |
| Useful luminous flux of the light source reference | in a sphere (360°) |
| Colour consistency in MacAdam ellipses (SDCM) | <6 (2700K) |
| CRI Min | Ra 80 |
| CRI Max | Ra 88 |

Additional information

| | |
|--|------------|
| Place of installation | Wall |
| Place of application | outdoor |
| Housing colour | Black |
| Impact protection | IK07 |
| Ultraviolet radiation | no |
| Operating temperature range | -25° +50°C |
| Suitable for installation in normally flammable surfaces | yes |

VIDEX®

VIDEX-6W-PELLE-BLACK

INDEX: VL-AR032-062B

| | |
|---------------------------|------------------|
| Mercury content | Does not contain |
| Ingress protection | IP54 |
| Housing material | Aluminum |


Dimensions

| | |
|-------------------------|---------------|
| EAN | 4820246480895 |
| Height | 150 mm |
| Width | 68 mm |
| Depth | 92 mm |
| In the package | 1 pc. |
| Outer box | 20 pcs. |
| Unit nett weight | 480g |

Signs marking goods

| | |
|--------------------------|-----------------|
| Packaging marking | CE, Utilization |
|--------------------------|-----------------|

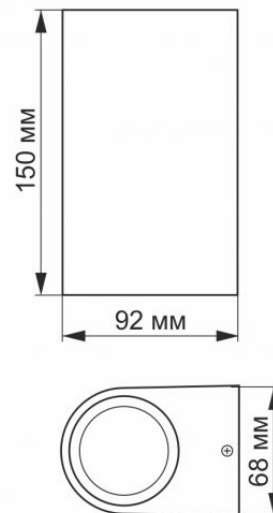

VIDEX[®]**VIDEX-6W-PELLE-BLACK****INDEX: VL-AR032-062B**

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.