

TECHNICAL CARD



Facade luminaire



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®

VIDEX-GU10-ARON-GRAY

INDEX: VL-AR011G



IK07



-20°C +50°C



IP54

WARRANTY 3 YEARS

General parameters

| | |
|--------------------------|----------|
| Light source replaceable | end user |
|--------------------------|----------|

Electrical parameters

| | |
|--------------------------|------------------------|
| Rated voltage, frequency | AC 220-240 V, 50/60 Hz |
|--------------------------|------------------------|

| | |
|-----------------|----------------|
| Input interface | Terminal block |
|-----------------|----------------|

| | |
|---------------------------------|---|
| Electric shock protection class | I |
|---------------------------------|---|

Additional information

| | |
|-----------------------|------|
| Place of installation | Wall |
|-----------------------|------|

| | |
|----------------------|---------|
| Place of application | outdoor |
|----------------------|---------|

| | |
|-------------------|------|
| Impact protection | IK07 |
|-------------------|------|

| | |
|----------------|------|
| Housing colour | Gray |
|----------------|------|

| | |
|-----------------------------|------------|
| Operating temperature range | -20° +50°C |
|-----------------------------|------------|

| | |
|--------------------|------|
| Ingress protection | IP54 |
|--------------------|------|

| | |
|------------------|----------|
| Housing material | Aluminum |
|------------------|----------|

Dimensions

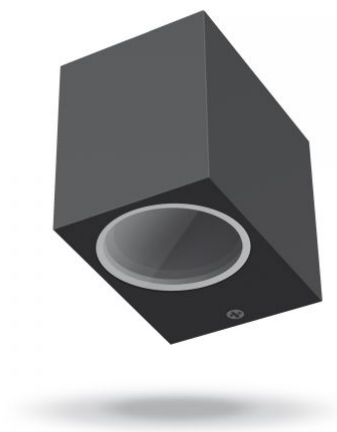
| | |
|-----|---------------|
| EAN | 4820246480819 |
|-----|---------------|

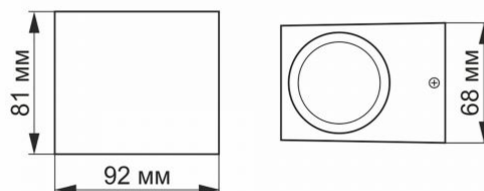
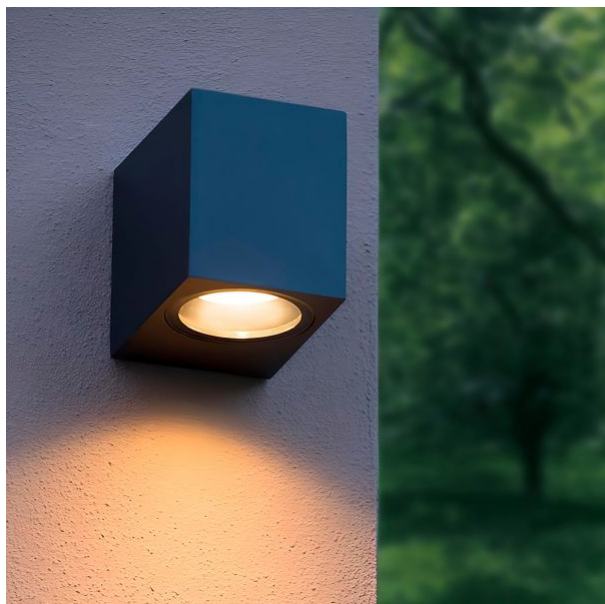
| | |
|--------|-------|
| Height | 81 mm |
|--------|-------|

| | |
|-------|-------|
| Depth | 92 mm |
|-------|-------|

| | |
|-----------|---------|
| Outer box | 20 pcs. |
|-----------|---------|

| | |
|-------|-------|
| Width | 68 mm |
|-------|-------|



INDEX: VL-AR011G

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.



The product must be used outdoors



Protection against electric shock class I. A product in which the means of protection against electric shock, in addition to the main insulation, is an additional protective circuit connected to the grounding of the power supply network



IK07

The product withstands a medium impact (e.g., from a blunt object)



-20°C +50°C

Operating temperatures range



IP54

Class of protection against dust and moisture. The product is protected against the ingress of water and dust particles into the housing