

## TECHNICAL CARD



Wall and ceiling spotlight luminaire



# VIDEX®



IK07



-25° +50°C



Free



IP20

## WARRANTY 2 YEARS

### General parameters

Light source replaceable end user

### Electrical parameters

Rated voltage, frequency AC 220-240 V, 50/60 Hz

Input interface Terminal block

Electric shock protection class I

### Additional information

Place of installation Ceiling, Wall

Place of application indoor

Impact protection IK07

Housing colour Black

Operating temperature range -25° +50°C

Mercury content Does not contain

Ingress protection IP20

Housing material Aluminum

### Dimensions

EAN 4820246487047

In the package 1 pc.

## VIDEX for GU10 lamp VL-SPF05B-BFB

### INDEX: VL-SPF05B-BFB

|                  |              |
|------------------|--------------|
| Outer box        | 30 pcs.      |
| Height           | 25 mm, 90 mm |
| Width            | 60 mm, 55 mm |
| Depth            | 60 mm, 55 mm |
| Unit nett weight | 300g         |


### Signs marking goods

Packaging marking CE, Utilization



### INDEX: VL-SPF05B-BFB

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.

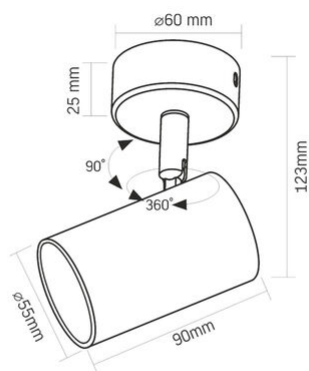

We reserve the right to make technical changes. The data contained in this material is not legally binding.



The product must be used indoors



Protection against electric shock class I. A product in which the means of protection against electric shock, in addition to the main insulation, is an additional protective circuit connected to the grounding of the power supply network



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



IK07

The product withstands a medium impact (e.g., from a blunt object)



-25° +50°C

Operating temperatures range



Free

The product does not contain mercury



IP20

Class of protection against dust and moisture. Protection against solid objects larger than 12 mm; no protection against moisture