

TECHNICAL CARD



Wall-mounted spot luminaire



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.



Ra ≥ 80



20 000



IK07



Not Dimmable



Free



IP20

WARRANTY 2 YEARS

The decorative wall luminaire is intended for installation near sofas, armchairs and beds. With a mechanical switch, it's great for reading and for bedside lighting. The body of the lamp is made of aluminum - a light and durable metal that is not subject to corrosion. The surface of the case is covered with matte paint with a sandy texture, resistant to small scratches.

General parameters

Light source replaceable	end user
---------------------------------	----------

Type of light source

Energy class of the light source	G
---	---

Dimmable	no
-----------------	----

Technology	LED
-------------------	-----

Electrical parameters

On-mode power (Pon)	5 W (back light)
----------------------------	------------------

Rated voltage, frequency	AC 220-240 V, 50/60 Hz, AC 185-240 V, 50/60 Hz (back light)
---------------------------------	---

VIDEX VL-SPF24E-B

INDEX: VL-SPF24E-B

Input interface	Terminal block
Electric shock protection class	I
Energy consumption in on-mode of the light source (kWh/1000h)	5

Photometric parameters

Useful luminous flux of the light source (Φuse)	380 Lm (back light)
Correlated color temperature	2700K (back light)
Color rendering index (CRI)	Ra > 80
Lifetime	40000 h
On/Off cycles	20000

Additional information

Place of installation	Wall
Place of application	indoor
Housing colour	Black
Impact protection	IK07
Operating temperature range	-25° +50°C
Mercury content	Does not contain
Ingress protection	IP20
Housing material	Aluminum

Dimensions

EAN	4820246485845
Height	160 mm, 100 mm, 110 mm
Width	55 mm, 160 mm

VIDEX®


VIDEX VL-SPF24E-B

INDEX: VL-SPF24E-B

Depth	55 mm, 31 mm
Outer box	20 pcs.
Unit nett weight	500g
In the package	1 pc.

Signs marking goods

Packaging marking CE, Utilization

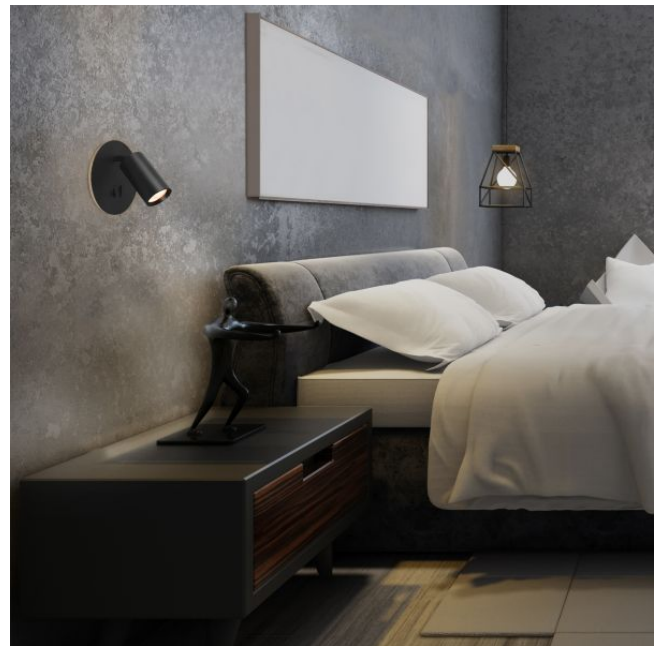

INDEX: VL-SPF24E-B

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.

