

# VIDEX®

VIDEX VL-SPF24E-B

INDEX: VL-SPF24E-B

## TECHNICAL CARD



Wall-mounted spot luminaire



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.



Ra ≥ 80



20 000



IK07



Not Dimmable



Free



IP20

## WARRANTY 2 YEARS

The decorative wall luminaire is intended for installation near sofas, armchairs and beds. With a mechanical switch, it's great for reading and for bedside lighting. The body of the lamp is made of aluminum - a light and durable metal that is not subject to corrosion. The surface of the case is covered with matte paint with a sandy texture, resistant to small scratches.

### General parameters

<b>Light source replaceable</b>	end user
---------------------------------	----------

### Type of light source

<b>Energy class of the light source</b>	G
---	---

<b>Dimmable</b>	no
-----------------	----

<b>Technology</b>	LED
-------------------	-----

### Electrical parameters

<b>On-mode power (Pon)</b>	5 W (back light)
----------------------------	------------------

<b>Rated voltage, frequency</b>	AC 220-240 V, 50/60 Hz, AC 185-240 V, 50/60 Hz (back light)
---------------------------------	---

## VIDEX VL-SPF24E-B

### INDEX: VL-SPF24E-B

<b>Input interface</b>	Terminal block
<b>Electric shock protection class</b>	I
<b>Energy consumption in on-mode of the light source (kWh/1000h)</b>	5

### Photometric parameters

<b>Useful luminous flux of the light source (Φuse)</b>	380 Lm (back light)
<b>Correlated color temperature</b>	2700K (back light)
<b>Color rendering index (CRI)</b>	Ra > 80
<b>Lifetime</b>	40000 h
<b>On/Off cycles</b>	20000

### Additional information

<b>Place of installation</b>	Wall
<b>Place of application</b>	indoor
<b>Housing colour</b>	Black
<b>Impact protection</b>	IK07
<b>Operating temperature range</b>	-25° +50°C
<b>Mercury content</b>	Does not contain
<b>Ingress protection</b>	IP20
<b>Housing material</b>	Aluminum

### Dimensions

<b>EAN</b>	4820246485845
<b>Height</b>	160 mm, 100 mm, 110 mm
<b>Width</b>	55 mm, 160 mm

# VIDEX®


## VIDEX VL-SPF24E-B

### INDEX: VL-SPF24E-B

<b>Depth</b>	55 mm, 31 mm
<b>Outer box</b>	20 pcs.
<b>Unit nett weight</b>	500g
<b>In the package</b>	1 pc.

### Signs marking goods

**Packaging marking** CE, Utilization

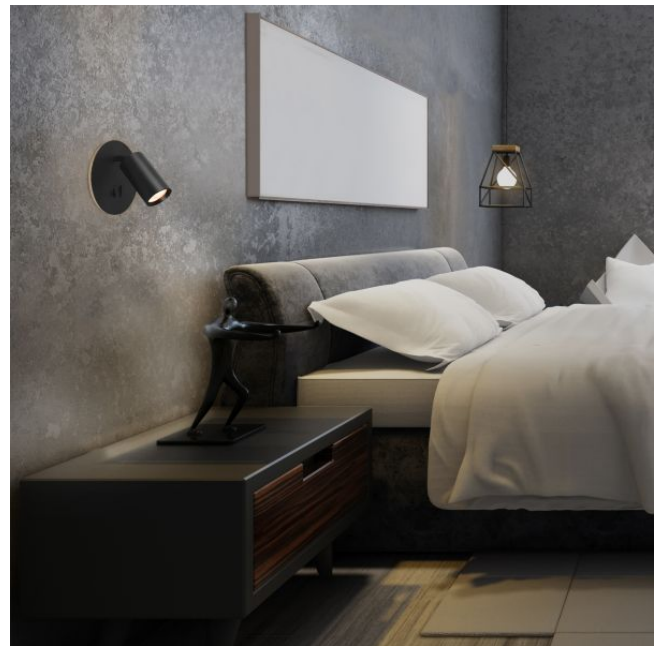

**INDEX: VL-SPF24E-B**

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro Opt Sp. z o.o., Handlowa 23, 05-120 Legionowo, Poland.

