

## TECHNICAL CARD



### INDEX: VL-SPF14A-WB



IK07



-25° +50°C



Free



IP20

### WARRANTY 2 YEARS

#### General parameters

**Light source replaceable** end user

#### Electrical parameters

**Rated voltage, frequency** AC 220-240 V, 50/60 Hz

**Input interface** Terminal block

**Electric shock protection class** I

#### Additional information

**Place of installation** Ceiling

**Place of application** indoor

**Impact protection** IK07

**Housing colour** White

**Operating temperature range** -25° +50°C

**Mercury content** Does not contain

**Ingress protection** IP20

**Housing material** Aluminum

#### Dimensions

**EAN** 4820246482998



**Height** 140 mm

**Depth** 90 mm

**Width** 90 mm

**Outer box** 20 pcs.

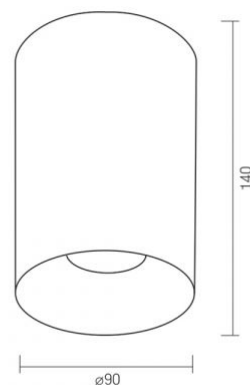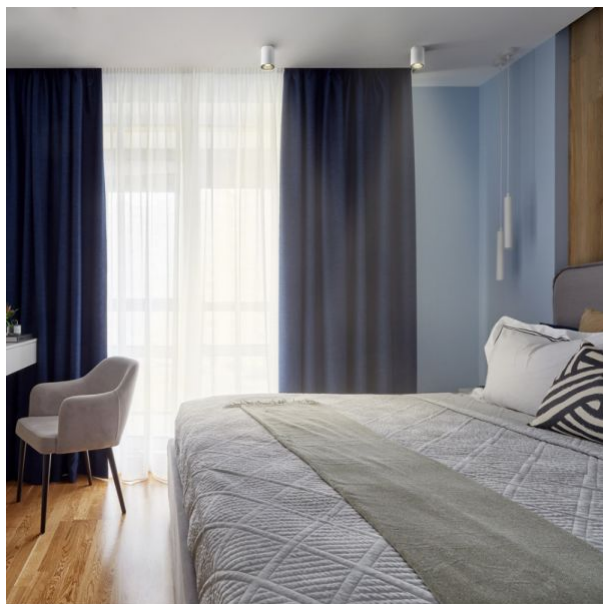

**INDEX: VL-SPF14A-WB**


We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.



The product must be used indoors



Protection against electric shock class I. A product in which the means of protection against electric shock, in addition to the main insulation, is an additional protective circuit connected to the grounding of the power supply network



— The product withstands a medium impact (e.g., from a blunt object)



— Operating temperatures range



— The product does not contain mercury



— Class of protection against dust and moisture. Protection against solid objects larger than 12 mm; no protection against moisture