


TECHNICAL CARD



LED Bulb



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

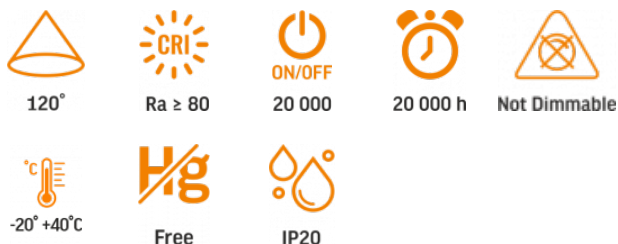VIDEX®
VIDEX-GU10-7W-NW
INDEX: VLE-MR16e-07104


WARRANTY 2 YEARS

NEUTRAL WHITE

4000K

Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálina biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutrálno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

Type of light source

Energy class of the light source	F
Dimmable	no

Electrical parameters

On-mode power (Pon)	7 W
Rated voltage, frequency	AC 220-240 V, 50/60 Hz
Rated current	60 mA

Photometric parameters

Useful luminous flux of the contained light source (Φ_{use})	600 Lm
Correlated color temperature	4000K (neutral white)
Beam angle	120°

Color rendering index (CRI)	Ra > 80
On/Off cycles	20000
Lifetime (L70B50)	20000 h
Useful luminous flux of the light source reference	in a sphere (360°)

Additional information

Place of application	indoor
Operating temperature range	-20° +40°C
Mercury content	Does not contain
Ingress protection	IP20


Dimensions

EAN	5904405540527
Height	55 mm
Depth	50 mm
Outer box	20 pcs.
Width	50 mm

VIDEX®

VIDEX-GU10-7W-NW

INDEX: VLE-MR16e-07104

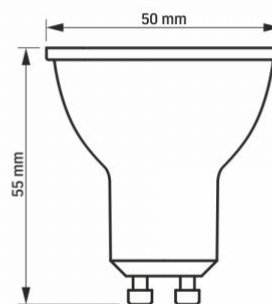

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.



The product must be used indoors



120°

— Rated beam angle



Ra ≥ 80

— Ra > 80 – color rendering index



20 000

— Rated On/off cycles



20 000 h

— Nominal lifetime (hours)



Not Dimmable

— The product is incompatible with light regulators



-20° +40°C

— Operating temperatures range



Free

— The product does not contain mercury



IP20

— Class of protection against dust and moisture.
Protection against solid objects larger than 12 mm; no protection against moisture

Date: 3.08.2025