

## TECHNICAL CARD



LED Bulb



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.



## WARRANTY 2 YEARS



Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutrarno bijela / Neutralweiß / Alb neutru / Neutrus balta / Neitrāls balta / Neutraalne valge / Неутрално бяла / Bianco neutro.

## General parameters

**Light source or containing product** Light source

## Type of light source

|   |      |
|---|------|
| <b>Energy class of the light source</b>                         | F    |
| <b>Dimmable</b>   | yes  |
| <b>Directional (DLS) or non-directional (NDLS) light source</b> | NDLS |
| <b>Connected light source (cls)</b>                             | no   |
| <b>Color-tunable light source</b>                               | no   |
| <b>Mains (MLS) or non-mains (NMLS) light source</b>             | MLS  |
| <b>High luminance light source</b>                              | No   |
| <b>Anti-glare shield</b>  | No   |
| <b>Technology</b>   | LED  |

## INDEX: VLE-GX53D-10534

## Electrical parameters

|  |                        |
|--|------------------------|
| <b>On-mode power (Pon)</b>   | 10 W                   |
| <b>Rated voltage, frequency</b>                                      | AC 175-250 V, 50/60 Hz |
| <b>Rated current</b>   | 62 mA                  |
| <b>Displacement factor (cos φ1)</b>                                  | 0.9                    |
| <b>Survival factor</b>   | 0.9                    |
| <b>Energy consumption in on-mode of the light source (kWh/1000h)</b> | 10                     |

## Photometric parameters

|   |                       |
|---|-----------------------|
| <b>Useful luminous flux (Φuse)</b>                        | 950 Lm                |
| <b>Correlated color temperature</b>                       | 4000K (neutral white) |
| <b>Peak luminous intensity</b>                            | -                     |
| <b>Beam angle</b>   | 140°                  |
| <b>Color rendering index (CRI)</b>                        | Ra > 80               |
| <b>On/Off cycles</b>                                      | 20000                 |
| <b>Lifetime (L70B50)</b>                                  | 20000 h               |
| <b>Useful luminous flux of the light source reference</b> | in a sphere (360°)    |
| <b>Chromaticity coordinates (x)</b>                       | 0.38                  |
| <b>Chromaticity coordinates (y)</b>                       | 0.38                  |
| <b>R9 colour rendering index value</b>                    | >0                    |
| <b>The lumen maintenance factor</b>                       | ≥94.8%                |
| <b>Flicker metric (Pst LM)</b>                            | ≤1                    |
| <b>Stroboscopic effect metric (SVM)</b>                   | ≤0.4                  |
| <b>Colour consistency in MacAdam ellipses (SDCM)</b>      | <6 (4000K)            |

# VIDEX®

## VIDEX-GX53-DIM-10W-NW

### INDEX: VLE-GX53D-10534

|                |       |
|----------------|-------|
| <b>CRI Min</b> | Ra 80 |
| <b>CRI Max</b> | Ra 88 |

#### Additional information

|                                    |                  |
|------------------------------------|------------------|
| <b>Place of application</b>        | indoor           |
| <b>Housing colour</b>              | White            |
| <b>Operating temperature range</b> | -20° +40°C       |
| <b>Mercury content</b>             | Does not contain |
| <b>Ingress protection</b>          | IP20             |

#### Dimensions

|                         |                   |
|-------------------------|-------------------|
| <b>EAN</b>              | 5904405542668     |
| <b>In the package</b>   | 1 pc.             |
| <b>Outer box</b>        | 10 pcs., 100 pcs. |
| <b>Height</b>           | 74 mm             |
| <b>Width</b>            | 74 mm             |
| <b>Depth</b>            | 28 mm             |
| <b>Unit nett weight</b> | 52g               |


#### Signs marking goods

|                          |  |
|--------------------------|--|
| <b>Packaging marking</b> | Recycling of waste, CE, Not suitable for use under moisture, Utilization |
|--------------------------|--|







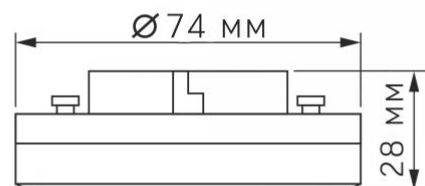










**VIDEX**<sup>®</sup>

VIDEX-GX53-DIM-10W-NW

**INDEX: VLE-GX53D-10534**

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.

-  The product must be used indoors
-  Waste recycling after the end of the product's service life
-  The product meets the requirements of EU directives
-  Not suitable for use under moisture
-  It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste
-  — Ra > 80 - color rendering index
-  — Rated On/off cycles
-  — Nominal lifetime (hours)
-  — The product supports brightness adjustment
-  — Operating temperatures range
-  — The flickering of the light does not exceed the permissible level
-  — The product has minimal flickering, which should not cause discomfort or danger
-  — Colour consistency in MacAdam ellipses (SDCM)
-  — The product does not contain mercury
-  — Class of protection against dust and moisture. Protection against solid objects larger than 12 mm; no protection against moisture