

## TECHNICAL CARD



LED Ceiling Light



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

## INDEX: VL-DL6S-18CW



Ra ≥ 80



25 000 h



Free



Not Dimmable



-20° +40°C



No Flicker



CCT 3000K



CCT 4000K



CCT 6500K



Free



IP20

## WARRANTY 2 YEARS

### General parameters

Light source or containing product	Light source
Light source replaceable	no
Control gear replaceable	-

### Type of light source

Energy class of the light source	F
Dimmable	no
Directional (DLS) or non-directional (NDLS) light source	NDLS
Connected light source (cls)	no
Color-tunable light source	yes
Mains (MLS) or non-mains (NMLS) light source	MLS
High luminance light source	No
Anti-glare shield	No
Technology	LED

### Electrical parameters

On-mode power (Pon)	18 W
Rated voltage, frequency	AC 220-240 V, 50/60 Hz
Rated current	110 mA
Input interface	Terminal block
Electric shock protection class	II
Displacement factor (cos φ1)	0.7
Survival factor	1
Energy consumption in on-mode of the light source (kWh/1000h)	18

### Photometric parameters

Useful luminous flux (Φuse)	1850 Lm
Correlated color temperature	6500K (cold white), 4000K (neutral white), 3000K (warm white)
Beam angle	140°
Color rendering index (CRI)	Ra > 80
On/Off cycles	15000
Lifetime (L70B50)	25000 h
Useful luminous flux of the light source reference	in a sphere (360°)
R9 colour rendering index value	>0
The lumen maintenance factor	≥94.8%
Flicker metric (Pst LM)	≤1
Stroboscopic effect metric (SVM)	-

### INDEX: VL-DL6S-18CW

<b>Colour consistency in MacAdam ellipses (SDCM)</b>	<6 (3000K), <6 (4000K), <6 (6500K)
<b>CRI Min</b>	Ra 80
<b>CRI Max</b>	Ra 88

### Additional information

<b>Place of installation</b>	Ceiling
<b>Place of application</b>	indoor
<b>Housing colour</b>	White
<b>Diffuser material</b>	Polycarbonate (PC)
<b>Ultraviolet radiation</b>	no
<b>Operating temperature range</b>	-20° +40°C
<b>Suitable for installation in normally flammable surfaces</b>	yes
<b>Mercury content</b>	Does not contain
<b>Ingress protection</b>	IP20
<b>Housing material</b>	PC

### Dimensions

<b>EAN</b>	4820246487948
<b>In the package</b>	1 pc.
<b>Outer box</b>	20 pcs.
<b>Height</b>	217 mm
<b>Width</b>	217 mm
<b>Depth</b>	17 mm
<b>Unit nett weight</b>	458g

### Signs marking goods

#### Packaging marking

Recycling of  
waste, CE,  
Utilization



**VIDEX<sup>®</sup>**

VIDEX DL6S 18W 3000K-4000K-65000K 230V White

**INDEX: VL-DL6S-18CW**

**VIDEX<sup>®</sup>**


VIDEX DL6S 18W 3000K-4000K-6500K 230V White

**INDEX: VL-DL6S-18CW**

# VIDEX®

## VIDEX DL6S 18W 3000K-4000K-65000K 230V White

### INDEX: VL-DL6S-18CW

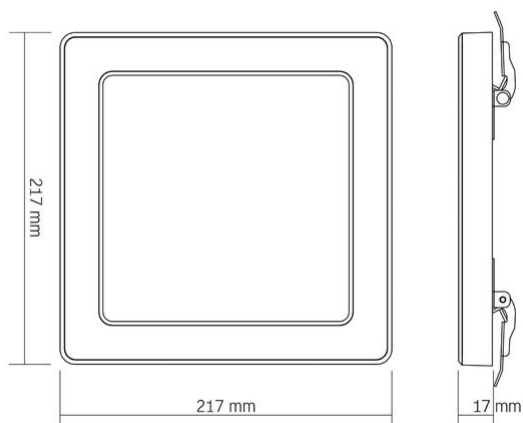

We reserve the right to make technical changes. The data contained in this material is

not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.



The product must be used indoors



Class of protection against electric shock II - provided not only by basic insulation but also by double or reinforced insulation



The product can be installed and used in/on normally flammable surfaces



Waste recycling after the end of the product's service life



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



Ra > 80

— Ra > 80 - color rendering index



25 000 h

— Nominal lifetime (hours)



Free

— The product does not emit ultraviolet light



Not Dimmable

— The product is incompatible with light regulators



-20° +40°C

— Operating temperatures range



No Flicker

— The flickering of the light does not exceed the permissible level



CCT 3000K

— Colour consistency in MacAdam ellipses (SDCM)



CCT 4000K

— Colour consistency in MacAdam ellipses (SDCM)



CCT 6500K

— Colour consistency in MacAdam ellipses (SDCM)



Free

— The product does not contain mercury



IP20

— Class of protection against dust and moisture. Protection against solid objects larger than 12 mm; no protection against moisture