

TECHNICAL CARD




LED Desk Lamp with Wireless Charging



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

INDEX: VL-TF17B

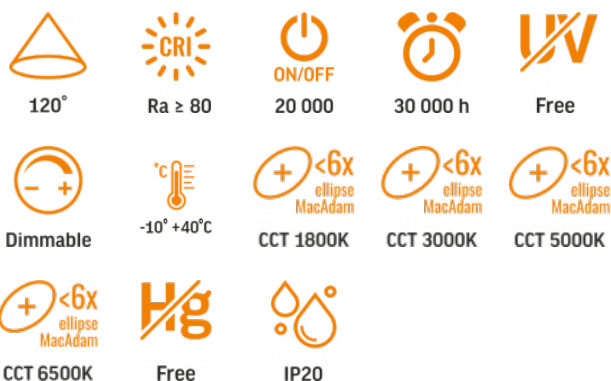

WARRANTY 3 YEARS

General parameters

Light source or containing product	Containing product
Light source replaceable	no
Control gear replaceable	yes

Type of light source

Energy efficiency class of the contained light source	F
Dimmable	yes
Directional (DLS) or non-directional (NDLS) light source	NDLS
Connected light source (cls)	no
Color-tunable light source	no
Mains (MLS) or non-mains (NMLS) light source	NMLS
Technology	LED

Electrical parameters

On-mode power (Pon)	7.5 W
Rated voltage, frequency	AC 100-240 V, 50/60 Hz
Rated current	174 mA
Input interface	AC adapter
Electric shock protection class	II
Displacement factor (cos φ1)	-
Survival factor	1
Energy consumption in on-mode of the light source (kWh/1000h)	18

Photometric parameters

Useful luminous flux of the contained light source (Φuse)	700 Lm
Correlated color temperature	6500K (cold white), 5000K (neutral white), 4500K (neutral white), 3800K (neutral white), 3000K (warm white), 1800K (warm white)
Beam angle	120°
Color rendering index (CRI)	Ra > 80
On/Off cycles	20000
Lifetime (L70B50)	30000 h
Useful luminous flux of the light source in a sphere reference (360°)	
R9 colour rendering index value	>0
The lumen maintenance factor	≥96%
Flicker metric (Pst LM)	-
Stroboscopic effect metric (SVM)	-

VIDEX®

VIDEX VL-TF17B Black

INDEX: VL-TF17B

Colour consistency in MacAdam ellipses (SDCM)	<6 (1800K),
	<6 (3000K),
	<6 (3800K),
	<6 (4500K),
	<6 (5000K),
	<6 (6500K)

CRI Min	Ra 80
----------------	-------

CRI Max	Ra 88
----------------	-------

Additional information

Place of installation	Desk
------------------------------	------

Place of application	indoor
-----------------------------	--------

Housing colour	Black
-----------------------	-------

Ultraviolet radiation	no
------------------------------	----

Operating temperature range	-10° +40°C
------------------------------------	------------

Mercury content	Does not contain
------------------------	------------------

Ingress protection	IP20
---------------------------	------

Housing material	Aluminum, ABS
-------------------------	------------------

Dimensions

EAN	4820246484046
------------	---------------

In the package	1 pc.
-----------------------	-------

Outer box	16 pcs.
------------------	---------

Height	403.5 mm
---------------	----------

Width	115 mm
--------------	--------

Depth	176.5 mm
--------------	----------

Unit nett weight	790g
-------------------------	------

Signs marking goods

Packaging marking

Recycling of
waste, CE,
Utilization



VIDEX®

VIDEX VL-TF17B Black

INDEX: VL-TF17B

VIDEX®


VIDEX VL-TF17B Black

INDEX: VL-TF17B

VIDEX®

VIDEX VL-TF17B Black

INDEX: VL-TF17B

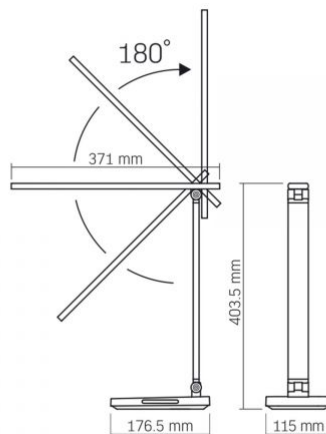

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11, 30-732 Krakow, Poland.



The product must be used indoors



Class of protection against electric shock II - provided not only by basic insulation but also by double or reinforced insulation



Waste recycling after the end of the product's service life



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



— Rated beam angle

120°



— Ra > 80 - color rendering index

Re > 80



— Rated On/off cycles

ON/OFF
20 000



— Nominal lifetime (hours)

30 000 h



— The product does not emit ultraviolet light



— The product supports brightness adjustment

Dimmable



— Operating temperatures range

-10° +40°C



— Colour consistency in MacAdam ellipses (SDCM)

+5x
CCT 1800K



— Colour consistency in MacAdam ellipses (SDCM)

+5x
CCT 3000K



— Colour consistency in MacAdam ellipses (SDCM)

+5x
CCT 5000K



— Colour consistency in MacAdam ellipses (SDCM)

+5x
CCT 6500K



— The product does not contain mercury

Free



— Class of protection against dust and moisture. Protection against solid objects larger than 12 mm; no protection against moisture

IP20

Date: 24.06.2026