

**VIDEX<sup>®</sup>**

VIDEX VLF-A056H 200Lm 5000K

**INDEX: VLF-A056H**

## TECHNICAL CARD



LED Headlamp



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

# VIDEX®



## WARRANTY 3 YEARS

### General parameters

Operation mode	HIGH, MIDDLE, LOW, RED HIGH, RED LOW, RED FLASH
Light source replaceable	no
Battery Warranty	1 year

### Type of light source

Dimmable	no
Technology	LED

### Electrical parameters

On-mode power (Pon)	10 W
Input interface	USB-C in battery

### Photometric parameters

Useful luminous flux of the contained light source (Φ <sub>use</sub> )	200 Lm
Correlated color temperature	5000K (neutral white), Red
Peak luminous intensity	1100 cd

## VIDEX VLF-A056H 200Lm 5000K

### INDEX: VLF-A056H

### Additional information

Housing colour	Black
Fall protection	2 m
Operating temperature range	-20° +40°C
Battery voltage	1.5 V
Battery capacity	2200 mAh
Battery type	Li-ion
Battery indicator	4 level
Battery replaceable	yes
Mercury content	Does not contain
Ingress protection	IP68
Housing material	Aviation anodized aluminum

### Dimensions

EAN	4820246488112
In the package	1 pc.
Height	74 mm
Outer box	20 pcs.
Width	20.5 mm
Depth	21 mm
Unit nett weight	75g

### Signs marking goods

Packaging marking	CE, Utilization
-------------------	-----------------

**VIDEX®**

VIDEX VLF-A056H 200Lm 5000K

INDEX: VLF-A056H



**VIDEX®**

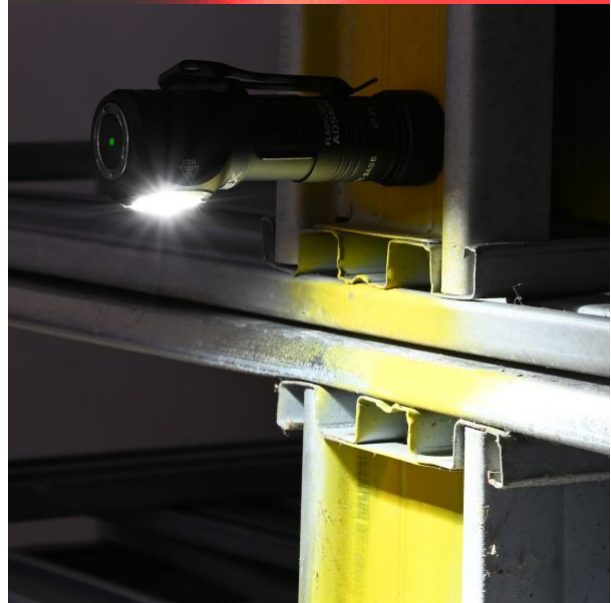
VIDEX VLF-A056H 200Lm 5000K

**INDEX: VLF-A056H**



**VIDEX<sup>®</sup>**

VIDEX VLF-A056H 200Lm 5000K

**INDEX: VLF-A056H**

# VIDEX®

## VIDEX VLF-A056H 200Lm 5000K

### INDEX: VLF-A056H



We reserve the right to make technical changes. The data contained in this material is

not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



2m  
SHOCK  
RESISTANT

— The protection is effective in case of a fall from a height of up to 2 meters



Not Dimmable

— The product is incompatible with light regulators



-20° +40°C

— Operating temperatures range



Free

— The product does not contain mercury



IP68

— Class of protection against dust and moisture. The product has full protection against dust and prolonged immersion in water at a depth of more than 1 meter