

TECHNICAL CARD



LED Portable Flashlight

VIDEX®



WARRANTY 3 YEARS



Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutrálno bijela / Neutralweiß / Alb neutru / Neutrus balta / Neitrāls balta / Neutraalne valge / Неутрално бяла / Bianco neutro.

General parameters

Operation mode	HIGH, LOW, MOON, STROBE
Light source replaceable	no
Battery Warranty	1 year

Type of light source

Dimmable	no
Technology	LED

Electrical parameters

On-mode power (Pon)	10 W
Input interface	USB-C

Photometric parameters

Useful luminous flux of the contained light source (Φuse)	300 Lm
Peak luminous intensity	1384 cd

VIDEX VLF-A351 300Lm 5000K

INDEX: VLF-A351

Correlated color temperature	5000K (neutral white)
------------------------------	-----------------------

Additional information

Housing colour	Black
Fall protection	1 m
Operating temperature range	-20° +40°C
Battery type	Li-ion 16340
Battery voltage	3.7 V
Battery capacity	800 mAh
Battery indicator	4 level
Battery replaceable	yes
Mercury content	Does not contain
Ingress protection	IP66
Housing material	Anodized aluminum

Dimensions

EAN	4820246485005
Height	86 mm
Depth	24 mm
Width	24 mm
In the package	1 pc.
Outer box	40 pcs.
Unit nett weight	51g

Signs marking goods

Packaging marking	CE, Utilization
-------------------	-----------------

VIDEX®

VIDEX VLF-A351 300Lm 5000K

INDEX: VLF-A351




VIDEX®**VIDEX VLF-A351 300Lm 5000K****INDEX: VLF-A351**

VIDEX[®]**VIDEX VLF-A351 300Lm 5000K****INDEX: VLF-A351**

VIDEX®

VIDEX VLF-A351 300Lm 5000K

INDEX: VLF-A351

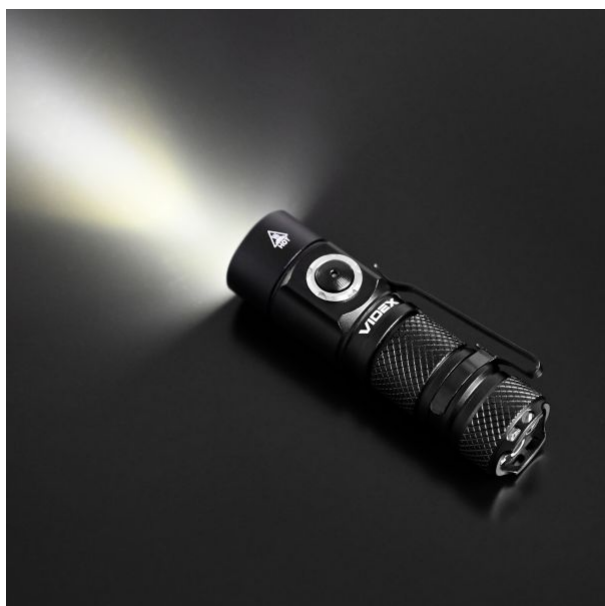

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



— The protection is effective in case of a fall from a height of up to 1 meter



— The product is incompatible with light regulators



— Operating temperatures range



— The product does not contain mercury



— Class of protection against dust and moisture. The product has full protection against dust and powerful water jets