

## TECHNICAL CARD



Universal Battery charger

# VIDEX®



Free

## WARRANTY 1 YEAR

### Electrical parameters

Input interface	USB-C
Electric shock protection class	II

### Additional information

Housing colour	Black
Operating temperature range	0° +35°C
Battery type	LiFePO4, Li-ion / IMR, Ni-MH / Cd
Battery voltage	3.2 V, 3.7 V, 1.2 V
Mercury content	Does not contain
Housing material	ABS

### Dimensions

EAN	4820118296579
Height	121 mm
Depth	33 mm
In the package	1 pc.
Outer box	20 pcs.
Width	60 mm
Unit nett weight	95g

VIDEX VCH-UD200

INDEX: VCH-UD200

### Signs marking goods

Packaging marking


CE, Utilization



# VIDEX<sup>®</sup>

VIDEX VCH-UD200

INDEX: VCH-UD200

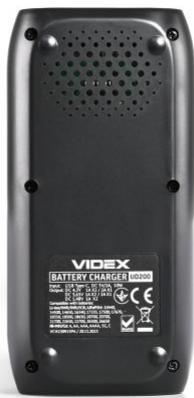

# VIDEX®

## VIDEX VCH-UD200

### INDEX: VCH-UD200



We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.



Class of protection against electric shock II - provided not only by basic insulation but also by double or reinforced insulation



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



— The product does not contain mercury