

## TECHNICAL CARD




Facade double-sided luminaire



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

# VIDEX®

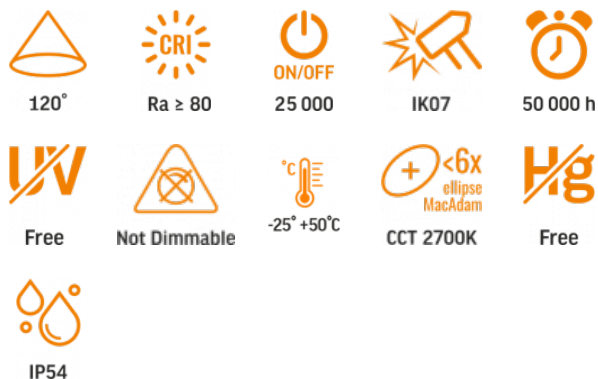

## WARRANTY 3 YEARS

### WARM WHITE



### 2700K

Warm White / Ciepła biel / Tepla bila / Blanc chaud / Tepla biela / Warm wit / Meleg feher / Topla bela / Topla bijela / Warmweiß / Alb cald / Šiltai balta / Silti balta / Soe valge / Тепло бяла / Bianco caldo.

### General parameters

Light source or containing product	Containing product
Control gear replaceable	no
Light source replaceable	no

### Type of light source

Energy efficiency class of the contained light source	F
Dimmable	no
Technology	LED

### Electrical parameters

On-mode power (Pon)	6 W
---------------------	-----

## VIDEX-6W-PELLE-BLACK

### INDEX: VL-AR032-062B

Rated voltage, frequency	AC 220-240 V, 50/60 Hz
Rated current	55 mA
Input interface	Terminal block
Electric shock protection class	I
Energy consumption in on-mode of the light source (kWh/1000h)	6

### Photometric parameters

Useful luminous flux of the contained light source (Φuse)	600 Lm
Correlated color temperature	2700K (warm white)
Beam angle	120°
Color rendering index (CRI)	Ra > 80
On/Off cycles	25000
Lifetime (L70B50)	50000 h
Useful luminous flux of the light source reference	in a sphere (360°)
Colour consistency in MacAdam ellipses (SDCM)	<6 (2700K)
CRI Min	Ra 80
CRI Max	Ra 88

### Additional information

Place of installation	Wall
Place of application	outdoor
Impact protection	IK07
Housing colour	Black
Ultraviolet radiation	no

# VIDEX®

## VIDEX-6W-PELLE-BLACK

### INDEX: VL-AR032-062B

<b>Operating temperature range</b>	-25° +50°C
<b>Suitable for installation in normally flammable surfaces</b>	yes
<b>Mercury content</b>	Does not contain
<b>Ingress protection</b>	IP54
<b>Housing material</b>	Aluminum

#### Dimensions

<b>EAN</b>	4820246480895
<b>In the package</b>	1 pc.
<b>Height</b>	150 mm
<b>Outer box</b>	20 pcs.
<b>Width</b>	68 mm
<b>Depth</b>	92 mm
<b>Unit nett weight</b>	480g

#### Signs marking goods


<b>Packaging marking</b>	CE, Utilization
--------------------------	-----------------



# VIDEX®

## VIDEX-6W-PELLE-BLACK

### INDEX: VL-AR032-062B

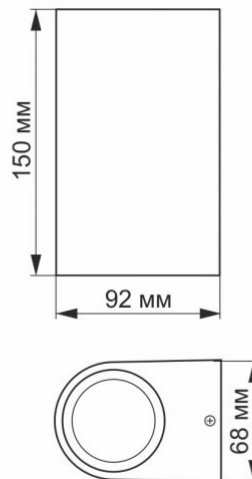

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.



The product must be used outdoors



Protection against electric shock class I. A product in which the means of protection against electric shock, in addition to the main insulation, is an additional protective circuit connected to the grounding of the power supply network



The product can be installed and used in/on normally flammable surfaces



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



— Rated beam angle



— Ra > 80 - color rendering index



— Rated On/off cycles



— The product withstands a medium impact (e.g., from a blunt object)



— Nominal lifetime (hours)



— The product does not emit ultraviolet light



— The product is incompatible with light regulators



— Operating temperatures range



— Colour consistency in MacAdam ellipses (SDCM)



— The product does not contain mercury



— Class of protection against dust and moisture. The product is protected against the ingress of water and dust particles into the housing

Date: 4.06.2026