

TECHNICAL CARD



LED Batten Light




Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®

VIDEX-HERMES-120CM-48W-IP65-NW

INDEX: VLE-BNW-48124

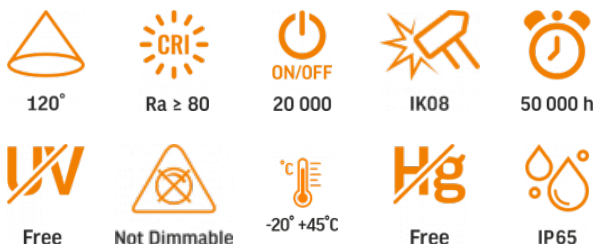

WARRANTY 3 YEARS

NEUTRAL WHITE



Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutrarno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Неутрално бяла / Bianco neutro.

General parameters

Light source or containing product	Containing product
Light source replaceable	by the producer
Control gear replaceable	-

Type of light source

Energy efficiency class of the contained light source	E
Dimmable	no
Technology	LED

Electrical parameters

On-mode power (Pon)	48 W
Rated voltage, frequency	AC 220-240 V, 50/60 Hz

Rated current	240 mA
Input interface	Terminal block
Electric shock protection class	I

Photometric parameters

Useful luminous flux of the contained light source (Φuse)	6000 Lm
Correlated color temperature	4000K (neutral white)
Beam angle	120°
Color rendering index (CRI)	Ra > 80
On/Off cycles	20000
Lifetime (L70B50)	50000 h
Useful luminous flux of the light source reference	in a sphere (360°)
CRI Min	Ra 80
CRI Max	Ra 88

Additional information

Place of installation	Ceiling, Flat surface, Wall
Place of application	indoor, outdoor
Impact protection	IK08
Housing colour	White
Diffuser material	Plastic
Minimum distance from the illuminated object	0.5 m
Ultraviolet radiation	no
Operating temperature range	-20° +45°C

VIDEX®

VIDEX-HERMES-120CM-48W-IP65-NW

INDEX: VLE-BNW-48124

Mercury content	Does not contain
Ingress protection	IP65
Housing material	Aluminum

Dimensions

EAN	5904405541425
In the package	1 pc.
Outer box	9 pcs.
Height	1200 mm
Width	87 mm
Depth	74 mm

Signs marking goods



Packaging marking	Recycling of waste, CE, Utilization
--------------------------	-------------------------------------



VIDEX®

VIDEX-HERMES-120CM-48W-IP65-NW

INDEX: VLE-BNW-48124

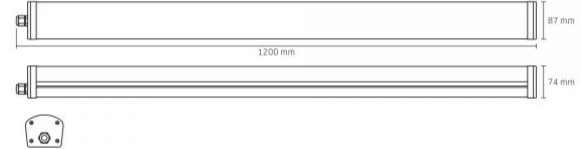


















Built-in terminal
block for convenient
and reliable
connection

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.

INDEX: VLE-BNW-48124

-  The product must be used indoors
-  The product must be used outdoors
-  Protection against electric shock class I. A product in which the means of protection against electric shock, in addition to the main insulation, is an additional protective circuit connected to the grounding of the power supply network
-  Minimum distance from the illuminated object
0,5 m
-  Waste recycling after the end of the product's service life
-  The product meets the requirements of EU directives
-  It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste
-  — Rated beam angle
120°
-  — Ra > 80 - color rendering index
Ra > 80
-  — Rated On/off cycles
ON/OFF
20 000
-  — The product withstands strong impacts (e.g., from a heavy object)
IK08
-  — Nominal lifetime (hours)
50 000 h
-  — The product does not emit ultraviolet light
Free
-  — The product is incompatible with light regulators
Not Dimmable
-  — Operating temperatures range
-20° +45°C
-  — The product does not contain mercury
Free
-  — Class of protection against dust and moisture.
The product has full protection against dust and water jets from all directions
IP65