

## TECHNICAL CARD




LED Bulkhead Light



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

# VIDEX®

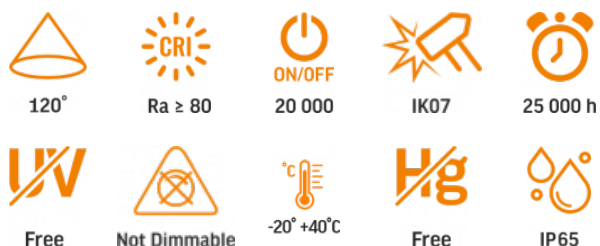

## WARRANTY 2 YEARS

### NEUTRAL WHITE



Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

## General parameters

Light source or containing product	Containing product
Light source replaceable	by the producer

## Type of light source

Dimmable	no
Technology	LED
Energy efficiency class of the contained light source	F

## Electrical parameters

On-mode power (Pon)	18 W
Rated voltage, frequency	AC 220-240 V, 50/60 Hz
Rated current	156 mA

## VIDEX-BULKHEAD-LED-INGA-18W-NW

### INDEX: VLE-BH12R-185

Input interface	Terminal block
Electric shock protection class	II

## Photometric parameters

Correlated color temperature	5000K (neutral white)
Useful luminous flux of the contained light source (Φuse)	1900 Lm
Beam angle	120°
Color rendering index (CRI)	Ra > 80
On/Off cycles	20000
Lifetime	25000 h
Useful luminous flux of the light source reference	in a sphere (360°)
CRI Min	Ra 80
CRI Max	Ra 88

## Additional information

Place of installation	Ceiling, Flat surface, Wall
Place of application	indoor, outdoor
Impact protection	IK07
Housing colour	Gray
Minimum distance from the illuminated object	0.5 m
Diffuser material	Polycarbonate (PC)
Ultraviolet radiation	no
Operating temperature range	-20° +40°C
Mercury content	Does not contain

# VIDEX®

## VIDEX-BULKHEAD-LED-INGA-18W-NW

### INDEX: VLE-BH12R-185

<b>Ingress protection</b>	IP65
---------------------------	------

<b>Housing material</b>	Plastic
-------------------------	---------

#### Dimensions

<b>EAN</b>	5904405540961
------------	---------------

<b>Height</b>	220 mm
---------------	--------

<b>Depth</b>	65 mm
--------------	-------

<b>Width</b>	220 mm
--------------	--------


<b>In the package</b>	1 pc.
-----------------------	-------

<b>Outer box</b>	16 pcs.
------------------	---------

#### Signs marking goods

##### Packaging marking


Recycling of  
waste, CE,  
Utilization



# VIDEX®






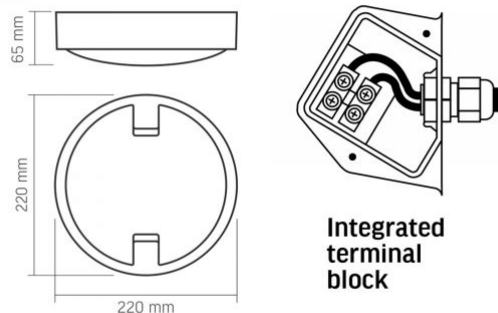











## VIDEX-BULKHEAD-LED-INGA-18W-NW

### INDEX: VLE-BH12R-185



We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.

-  The product must be used indoors
-  The product must be used outdoors
-  Minimum distance from the illuminated object  
0,5 m
-  Class of protection against electric shock II - provided not only by basic insulation but also by double or reinforced insulation
-  Waste recycling after the end of the product's service life
-  The product meets the requirements of EU directives
-  It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste
-  — Rated beam angle  
120°
-  — Ra > 80 - color rendering index
-  — Rated On/off cycles  
ON/OFF  
20 000
-  — The product withstands a medium impact (e.g., from a blunt object)  
IK07
-  — Nominal lifetime (hours)  
25 000 h
-  — The product does not emit ultraviolet light  
Free
-  — The product is incompatible with light regulators  
Not Dimmable
-  — Operating temperatures range  
-20° +40°C
-  — The product does not contain mercury  
Free
-  — Class of protection against dust and moisture. The product has full protection against dust and water jets from all directions  
IP65

Date: 31.03.2025