


TECHNICAL CARD



LED Ceiling Light with decorative backlight



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

INDEX: VL-DL5R-44CB



WARRANTY 2 YEARS

General parameters

| | |
|------------------------------------|--------------|
| Light source or containing product | Light source |
| Light source replaceable | no |

Type of light source

| | |
|--|------|
| Energy class of the light source | F |
| Dimmable | no |
| Directional (DLS) or non-directional (NDLS) light source | NDLS |
| Connected light source (cls) | no |
| Color-tunable light source | yes |
| Mains (MLS) or non-mains (NMLS) light source | MLS |
| High luminance light source | No |
| Anti-glare shield | No |
| Technology | LED |

Electrical parameters

| | |
|---|------------------------|
| On-mode power (Pon) | 44 W |
| Rated voltage, frequency | AC 220-240 V, 50/60 Hz |
| Rated current | 212 mA |
| Input interface | Terminal block |
| Electric shock protection class | II |
| Displacement factor (cos φ1) | 0.9 |
| Survival factor | 1 |
| Energy consumption in on-mode of the light source (kWh/1000h) | 44 |

Photometric parameters

| | |
|--|--|
| Useful luminous flux (Φuse) | 4800 Lm |
| Correlated color temperature | 5000K (neutral white), 4000K (neutral white), 3000K (warm white) |
| Beam angle | 140° |
| Color rendering index (CRI) | Ra > 80 |
| On/Off cycles | 20000 |
| Lifetime (L70B50) | 30000 h |
| Useful luminous flux of the light source reference | in a sphere (360°) |
| R9 colour rendering index value | >0 |
| The lumen maintenance factor | ≥96% |
| Flicker metric (Pst LM) | ≤1 |
| Stroboscopic effect metric (SVM) | - |

INDEX: VL-DL5R-44CB

Colour consistency in MacAdam ellipses (SDCM) <6 (3000K), <6 (4000K), <6 (5000K)

CRI Min Ra 80

CRI Max Ra 88

Additional information

Place of installation Ceiling

Place of application indoor, outdoor

Housing colour Black

Diffuser material Polypropylene (PP)

Minimum distance from the illuminated object 0.5 m

Ultraviolet radiation no

Operating temperature range -20° +40°C

Suitable for installation in normally flammable surfaces yes

Mercury content Does not contain

Ingress protection IP54

Housing material ABS

Dimensions

EAN 4820246487368

In the package 1 pc.

Height 500 mm

Outer box 10 pcs.

Width 500 mm


Depth 26 mm

Unit nett weight 1.66kg

Signs marking goods

Packaging marking

Recycling of waste, CE, Utilization

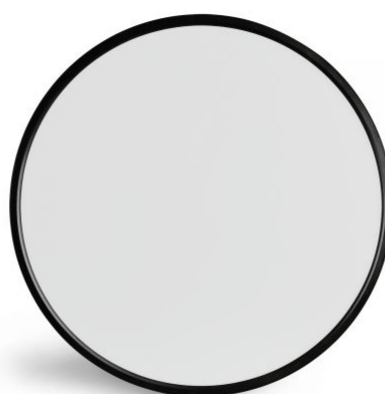


VIDEX[®]

VIDEX DL5R 44W 3000K-4000K-5000K 230V Black

INDEX: VL-DL5R-44CB

VIDEX[®]



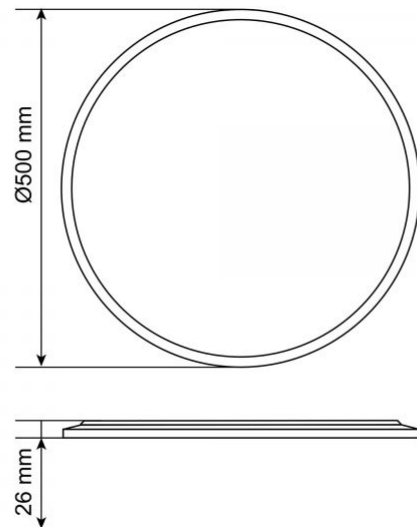






VIDEX DL5R 44W 3000K-4000K-5000K 230V Black

INDEX: VL-DL5R-44CB

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.

INDEX: VL-DL5R-44CB

-  The product must be used indoors
-  The product must be used outdoors
-  Class of protection against electric shock II - provided not only by basic insulation but also by double or reinforced insulation
-  Minimum distance from the illuminated object
0,5 m
-  The product can be installed and used in/on normally flammable surfaces
-  Waste recycling after the end of the product's service life
-  The product meets the requirements of EU directives
-  It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste
-  — Ra > 80 - color rendering index
-  — Rated On/off cycles
20 000
-  — Nominal lifetime (hours)
30 000 h
-  — The product does not emit ultraviolet light
Free
-  — The product is incompatible with light regulators
Not Dimmable
-  — Operating temperatures range
-20° +40°C
-  — The flickering of the light does not exceed the permissible level
No Flicker
-  — Colour consistency in MacAdam ellipses (SDCM)
CCT 3000K
-  — Colour consistency in MacAdam ellipses (SDCM)
CCT 4000K
-  — Colour consistency in MacAdam ellipses (SDCM)
CCT 5000K
-  — The product does not contain mercury
Free
-  — Class of protection against dust and moisture.
The product is protected against the ingress of water and dust particles into the housing