

TECHNICAL CARD



LED Downlight Fixture



VIDEX®



120°



Ra ≥ 80



20 000



30 000 h



Free



Not Dimmable



-20° +40°C



Free



IP20

WARRANTY 2 YEARS

NEUTRAL WHITE



4000K

Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutrálno bijela / Neutralweiß / Alb neutru / Neutrus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

General parameters

| | |
|------------------------------------|--------------------|
| Light source or containing product | Containing product |
| Control gear replaceable | - |
| Light source replaceable | by the producer |

Type of light source

| | |
|---|----|
| Energy efficiency class of the contained light source | F |
| Dimmable | no |

Electrical parameters

| | |
|--------------------------|------------------------|
| On-mode power (Pon) | 6 W |
| Rated voltage, frequency | AC 220-240 V, 50/60 Hz |
| Rated current | 45 mA |

VIDEX-DOWNLIGHT-LED-DLBS-064-6W-NW

INDEX: VLE-DLBS-064

| | |
|---------------------------------|----------------|
| Input interface | Free wire ends |
| Electric shock protection class | II |

Photometric parameters

| | |
|---|-----------------------|
| Useful luminous flux of the contained light source (Φuse) | 620 Lm |
| Correlated color temperature | 4000K (neutral white) |
| Beam angle | 120° |
| Color rendering index (CRI) | Ra > 80 |
| On/Off cycles | 20000 |
| Lifetime (L70B50) | 30000 h |
| Useful luminous flux of the light source reference | in a sphere (360°) |

Additional information


| | |
|-----------------------------|-------------------|
| Place of installation | Ceiling, Recessed |
| Place of application | indoor |
| Housing colour | White |
| Ultraviolet radiation | no |
| Operating temperature range | -20° +40°C |
| Mercury content | Does not contain |
| Ingress protection | IP20 |
| Housing material | Plastic |

Dimensions

| | |
|-----|---------------|
| EAN | 5904405540893 |
|-----|---------------|


VIDEX[®]

VIDEX-DOWNLIGHT-LED-DLBS-064-6W-NW

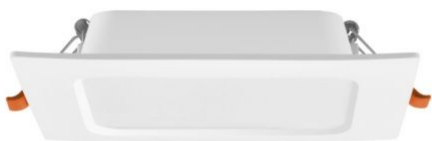INDEX: VLE-DLBS-064**Height** 120 mm**Outer box** 40 pcs.**Width** 120 mm**Depth** 27 mm

INDEX: VLE-DLBS-064

30-732 Krakow, Poland.

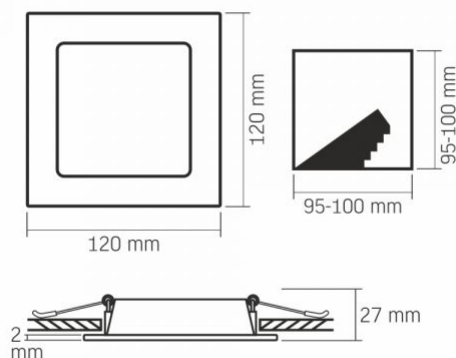

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,



The product must be used indoors



Class of protection against electric shock II - provided not only by basic insulation but also by double or reinforced insulation



120°

Rated beam angle



Ra > 80

Ra > 80 - color rendering index



20 000

Rated On/off cycles



30 000 h

Nominal lifetime (hours)



Free

The product does not emit ultraviolet light



Not Dimmable

The product is incompatible with light regulators



-20° +40°C

Operating temperatures range



Free

The product does not contain mercury



IP20

Class of protection against dust and moisture. Protection against solid objects larger than 12 mm; no protection against moisture