

## TECHNICAL CARD



LED Floodlight



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

# VIDEX®



Ra ≥ 80

ON/OFF  
20 000

IK07



30 000 h



Free



Not Dimmable



-20°C +50°C



No Flicker



CCT 5000K




Free



IP65

## WARRANTY 2 YEARS

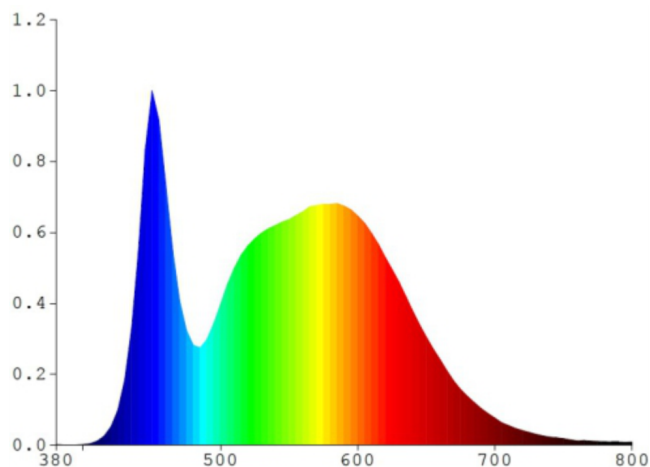

### NEUTRAL WHITE



### 5000K

Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Neutrnalno bela / Neutrnalno bijela / Neutralweiß / Alb neutru / Neutrnalus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

## General parameters

<b>Light source or containing product</b>	Light source
<b>Light source replaceable</b>	no
<b>Control gear replaceable</b>	no

## VIDEX-FLOOD-LED-F3-30W-5K

### INDEX: VLE-F3-0305B

## Type of light source

<b>Energy class of the light source</b>	F
<b>Dimmable</b>	no
<b>Directional (DLS) or non-directional (NDLS) light source</b>	DLS
<b>Connected light source (cls)</b>	no
<b>Color-tunable light source</b>	no
<b>Mains (MLS) or non-mains (NMLS) light source</b>	MLS
<b>High luminance light source</b>	No
<b>Anti-glare shield</b>	No
<b>Technology</b>	LED

## Electrical parameters

<b>On-mode power (Pon)</b>	30 W
<b>Rated voltage, frequency</b>	AC 220-240 V, 50/60 Hz
<b>Cable length</b>	20 cm
<b>Rated current</b>	150 mA
<b>Input interface</b>	Free wire ends
<b>Electric shock protection class</b>	I
<b>Displacement factor (cos φ1)</b>	0.9
<b>Survival factor</b>	0.9
<b>Energy consumption in on-mode of the light source (kWh/1000h)</b>	30

## Photometric parameters

<b>Luminous flux</b>	2850 Lm
<b>Useful luminous flux (Φuse)</b>	2400 Lm

## INDEX: VLE-F3-0305B

<b>Correlated color temperature</b>	5000K (neutral white)
<b>Peak luminous intensity</b>	1200 cd
<b>Beam angle</b>	110°
<b>Color rendering index (CRI)</b>	Ra > 80
<b>On/Off cycles</b>	20000
<b>Lifetime (L70B50)</b>	30000 h
<b>Useful luminous flux of the light source reference</b>	in a wide cone (120°)
<b>Chromaticity coordinates (x)</b>	0.34
<b>Chromaticity coordinates (y)</b>	0.359
<b>R9 colour rendering index value</b>	>0
<b>The lumen maintenance factor</b>	≥96%
<b>Flicker metric (Pst LM)</b>	≤1
<b>Stroboscopic effect metric (SVM)</b>	outdoor use
<b>Colour consistency in MacAdam ellipses (SDCM)</b>	<6 (5000K)
<b>CRI Min</b>	Ra 80
<b>CRI Max</b>	Ra 88

### Additional information

<b>Vertical adjustment range</b>	180°
<b>Place of installation</b>	Ceiling, Flat surface, Wall
<b>Place of application</b>	outdoor
<b>Impact protection</b>	IK07
<b>Housing colour</b>	Black
<b>Diffuser material</b>	Polycarbonate (PC)

<b>Minimum distance from the illuminated object</b>	0.5 m
<b>Ultraviolet radiation</b>	no
<b>Motion sensor</b>	no
<b>Operating temperature range</b>	-20° +50°C
<b>Suitable for installation in normally flammable surfaces</b>	yes
<b>Mercury content</b>	Does not contain
<b>Ingress protection</b>	IP65
<b>Housing material</b>	Aluminum alloy

### Dimensions

<b>EAN</b>	5904405542446
<b>In the package</b>	1 pc.
<b>Outer box</b>	20 pcs.
<b>Height</b>	100 mm
<b>Width</b>	141 mm
<b>Depth</b>	33 mm
<b>Unit nett weight</b>	230g

### Signs marking goods


<b>Packaging marking</b>	Recycling of waste, CE, Utilization
--------------------------	-------------------------------------

**VIDEX<sup>®</sup>**

VIDEX-FLOOD-LED-F3-30W-5K

**INDEX: VLE-F3-0305B**

### INDEX: VLE-F3-0305B

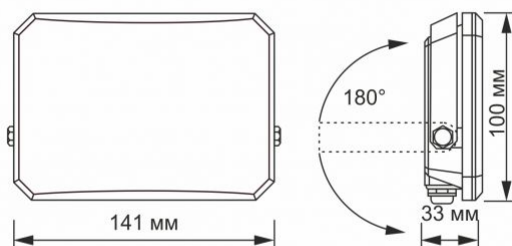

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.



The product must be used outdoors



Protection against electric shock class I. A product in which the means of protection against electric shock, in addition to the main insulation, is an additional protective circuit connected to the grounding of the power supply network



Minimum distance from the illuminated object



The product can be installed and used in/on normally flammable surfaces



Waste recycling after the end of the product's service life



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



Ra > 80

— Ra > 80 - color rendering index



ON/OFF  
20 000

— Rated On/off cycles



IK07

— The product withstands a medium impact (e.g., from a blunt object)



30 000 h

— Nominal lifetime (hours)



Free

— The product does not emit ultraviolet light



Not Dimmable

— The product is incompatible with light regulators



-20°C +50°C

— Operating temperatures range



No Flicker

— The flickering of the light does not exceed the permissible level



+ <math>6x</math>  
MacAdam  
CCT 5000K

— Colour consistency in MacAdam ellipses (SDCM)



Free

— The product does not contain mercury



IP65

— Class of protection against dust and moisture.  
The product has full protection against dust and water jets from all directions