

TECHNICAL CARD



LED RECHARGEABLE LIGHT with REMOTE CONTROL



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®



120°



Ra ≥ 80



Free



Dimmable



-20° +40°C



Free



IP20

WARRANTY 2 YEARS

General parameters

| | |
|--------------------------|----|
| Light source replaceable | no |
|--------------------------|----|

Type of light source

| | |
|----------|-----|
| Dimmable | yes |
|----------|-----|

| | |
|------------|-----|
| Technology | LED |
|------------|-----|

Electrical parameters

| | |
|---------------------|-------|
| On-mode power (Pon) | 1.5 W |
|---------------------|-------|

| | |
|-----------------|-------|
| Input interface | USB-C |
|-----------------|-------|

| | |
|---------------------------------|-----|
| Electric shock protection class | III |
|---------------------------------|-----|

Photometric parameters

| | |
|---------------|--------|
| Luminous flux | 150 Lm |
|---------------|--------|

| | |
|------------------------------|---|
| Correlated color temperature | 6500K (cold white), 4500K (neutral white), 3000K (warm white) |
|------------------------------|---|

| | |
|------------|------|
| Beam angle | 120° |
|------------|------|

| | |
|-----------------------------|---------|
| Color rendering index (CRI) | Ra > 80 |
|-----------------------------|---------|

VIDEX VL-NL049W-R

INDEX: VL-NL049W-R

| | |
|---------|-------|
| CRI Min | Ra 80 |
|---------|-------|

| | |
|---------|-------|
| CRI Max | Ra 88 |
|---------|-------|

Additional information

| | |
|----------------------|--------|
| Place of application | indoor |
|----------------------|--------|

| | |
|----------------|-------|
| Housing colour | White |
|----------------|-------|

| | |
|-----------------------|----|
| Ultraviolet radiation | no |
|-----------------------|----|

| | |
|---------------|----|
| Motion sensor | no |
|---------------|----|

| | |
|-----------------------------|------------|
| Operating temperature range | -20° +40°C |
|-----------------------------|------------|

| | |
|-----------------|-------|
| Battery voltage | 3.7 V |
|-----------------|-------|

| | |
|------------------|----------|
| Battery capacity | 2200 mAh |
|------------------|----------|

| | |
|--------------|--------|
| Battery type | Li-pol |
|--------------|--------|

| | |
|---------------------|----|
| Battery replaceable | no |
|---------------------|----|

| | |
|-----------------|------------------|
| Mercury content | Does not contain |
|-----------------|------------------|

| | |
|--------------------|------|
| Ingress protection | IP20 |
|--------------------|------|

| | |
|------------------|-----|
| Housing material | ABS |
|------------------|-----|

Dimensions

| | |
|-----|---------------|
| EAN | 4820246485326 |
|-----|---------------|

| | |
|----------------|-------|
| In the package | 1 pc. |
|----------------|-------|

| | |
|-----------|---------|
| Outer box | 24 pcs. |
|-----------|---------|

| | |
|--------|--------|
| Height | 300 mm |
|--------|--------|

| | |
|-------|-------|
| Width | 39 mm |
|-------|-------|

| | |
|-------|-------|
| Depth | 36 mm |
|-------|-------|

| | |
|------------------|------|
| Unit nett weight | 150g |
|------------------|------|

Signs marking goods

VIDEX[®]

VIDEX VL-NL049W-R

INDEX: VL-NL049W-R**Packaging marking**Recycling of
waste, CE,
Utilization

VIDEX[®]

VIDEX VL-NL049W-R

INDEX: VL-NL049W-R

TOUCH CONTROL



ROTATE BASE





MAGNETIC BASE





VIDEX[®]

VIDEX VL-NL049W-R

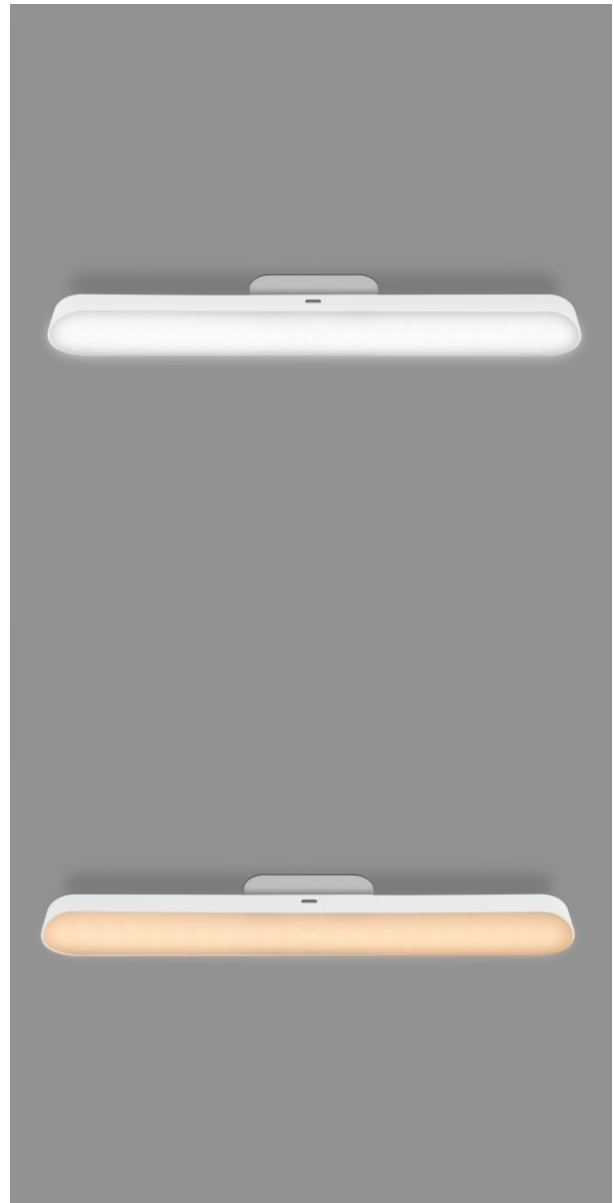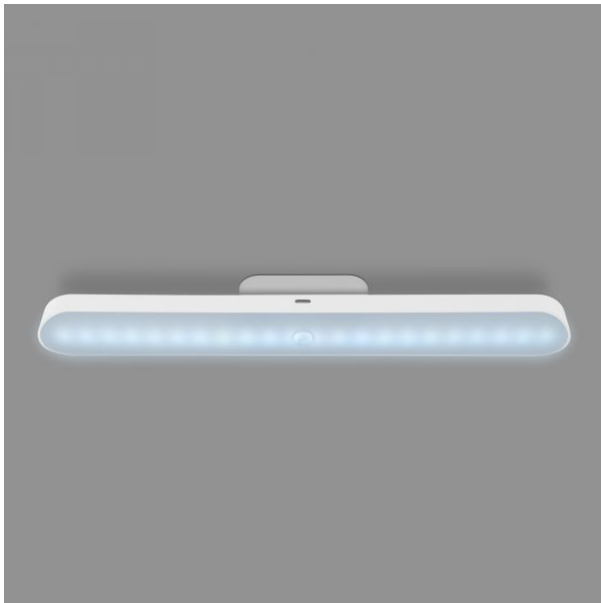INDEX: VL-NL049W-R

INDEX: VL-NL049W-R

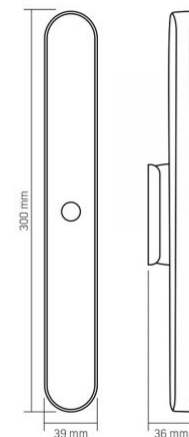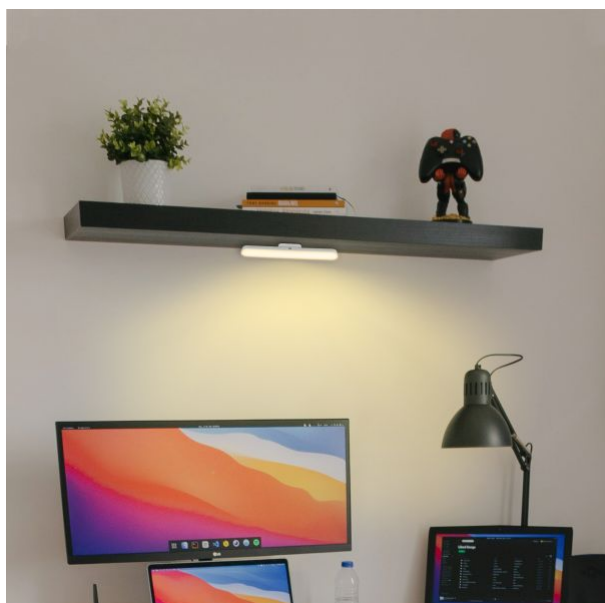

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.



The product must be used indoors



Class III protection against electric shock - ensured by supplying a specific product with a safe very low voltage (SELV) without the risk of creating a voltage above safe levels



Waste recycling after the end of the product's service life



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



— Rated beam angle



— Ra > 80 - color rendering index



— The product does not emit ultraviolet light



— The product supports brightness adjustment



— Operating temperatures range



— The product does not contain mercury



— Class of protection against dust and moisture. Protection against solid objects larger than 12 mm; no protection against moisture