

## TECHNICAL CARD



Light sensor



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

# VIDEX®



Free



-20° +40°C



IP44

## WARRANTY 2 YEARS

### Electrical parameters

<b>Rated voltage, frequency</b>	AC 220-240 V, 50/60 Hz
<b>Input interface</b>	Free wire ends
<b>Electric shock protection class</b>	II

### Photometric parameters

<b>Sensor activation threshold</b>	<10-100 Lx
<b>Sensor deactivation threshold</b>	>40-250 Lx

### Additional information

<b>Place of installation</b>	Ceiling, Flat surface, Wall
<b>Place of application</b>	indoor, outdoor
<b>Housing colour</b>	White
<b>Ultraviolet radiation</b>	no
<b>Motion sensor</b>	yes
<b>Sensor type</b>	Microwave
<b>Operating temperature range</b>	-20° +40°C
<b>Ingress protection</b>	IP44
<b>Housing material</b>	ABS, PE (Polyethylene)

## VIDEX 10A photometrical

### INDEX: VL-SN02

### Dimensions

<b>EAN</b>	4820118299303
<b>In the package</b>	1 pc.
<b>Height</b>	138 mm
<b>Outer box</b>	50 pcs.
<b>Width</b>	77 mm
<b>Depth</b>	59 mm
<b>Unit nett weight</b>	88g

### Signs marking goods

#### Packaging marking

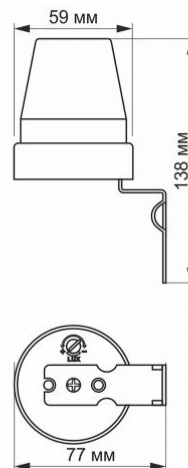
Recycling of waste, CE, Utilization



# VIDEX®

## VIDEX 10A photometrical

### INDEX: VL-SN02

ON  
OFFLUX  
10-100 lx  
40-250 lx-20°C  
+40°C

10A

IP44

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.



The product must be used indoors



The product must be used outdoors



Class of protection against electric shock II - provided not only by basic insulation but also by double or reinforced insulation



Waste recycling after the end of the product's service life



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



Free

The product does not emit ultraviolet light



-20° +40°C

Operating temperatures range



IP44

Class of protection against dust and moisture. Protection against solid foreign objects with a diameter of 1 mm and greater and against water splashes

Date: 4.06.2026