

TECHNICAL CARD



Light sensor



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®



Free



-20° +40°C



IP44

WARRANTY 2 YEARS

Electrical parameters

Rated voltage, frequency	AC 220-240 V, 50/60 Hz
Input interface	Free wire ends
Electric shock protection class	II

Photometric parameters

Sensor activation threshold	<10-50 Lx
Sensor deactivation threshold	>50-100 Lx

Additional information

Place of installation	Ceiling, Flat surface, Wall
Place of application	indoor, outdoor
Housing colour	White
Ultraviolet radiation	no
Motion sensor	yes
Sensor type	Microwave
Operating temperature range	-20° +40°C
Ingress protection	IP44
Housing material	ABS, PE (Polyethylene)

VIDEX 25A photometrical

INDEX: VL-SN03

Dimensions

EAN	4820118299280
Height	136 mm
Depth	75 mm
In the package	1 pc.
Outer box	50 pcs.
Width	85 mm
Unit nett weight	132g

Signs marking goods

Packaging marking


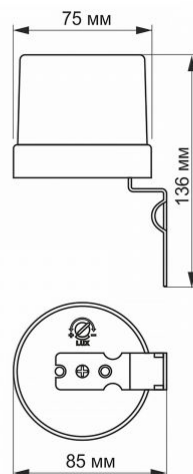
Recycling of waste, CE, Utilization



VIDEX®

VIDEX 25A photometrical

INDEX: VL-SN03

ON
OFF10-50 lx
50-100 lx-20°C
+40°C

25A

IP44

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.



The product must be used indoors



The product must be used outdoors



Class of protection against electric shock II - provided not only by basic insulation but also by double or reinforced insulation



Waste recycling after the end of the product's service life



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



The product does not emit ultraviolet light



Operating temperatures range



Class of protection against dust and moisture. Protection against solid foreign objects with a diameter of 1 mm and greater and against water splashes