

TECHNICAL CARD



PIR motion and light sensor



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®



Free



-20° +40°C



IP20

WARRANTY 2 YEARS

Electrical parameters

Rated voltage, frequency	AC 220-240 V, 50/60 Hz
Input interface	Free wire ends
Electric shock protection class	II
Standby Power (Psb)	<0.9 W

Photometric parameters

Sensor light threshold	10-2000 Lx
------------------------	------------

Additional information

Place of installation	Ceiling, Flat surface, Wall
Place of application	indoor
Housing colour	Black
Ultraviolet radiation	no
Motion sensor	yes
Sensor type	PIR
Sensor detection angle	360°
Sensor time delay	10 s - 7 min
Sensor detection distance	2 - 8 m
Operating temperature range	-20° +40°C
Ingress protection	IP20

VIDEX VL-SPC12B 1200W

INDEX: VL-SPC12B

Housing material

ABS, PE
(Polyethylene)



Dimensions

EAN	4820246484626
Height	88 mm
Depth	34 mm
In the package	1 pc.
Outer box	50 pcs.
Width	88 mm
Unit nett weight	88g

Signs marking goods

Packaging marking	Recycling of waste, CE, Utilization
-------------------	-------------------------------------

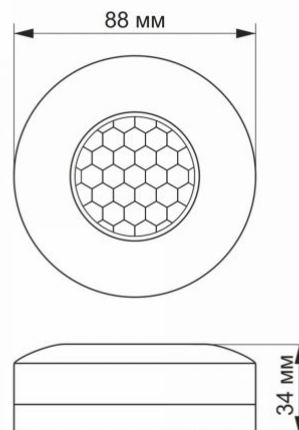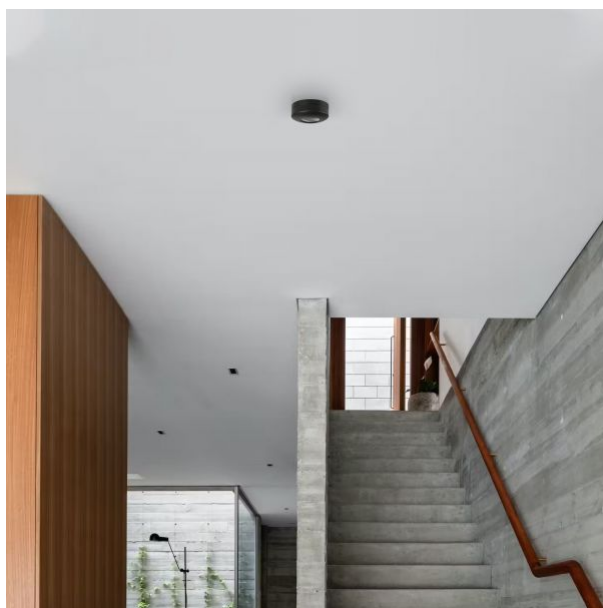

INDEX: VL-SPC12B


We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.



The product must be used indoors



Class of protection against electric shock II - provided not only by basic insulation but also by double or reinforced insulation



Waste recycling after the end of the product's service life



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



Free

— The product does not emit ultraviolet light



-20° +40°C

— Operating temperatures range



IP20

— Class of protection against dust and moisture. Protection against solid objects larger than 12 mm; no protection against moisture