

INDEX: VL-SPF09S-W

TECHNICAL CARD



VIDEX®



IK07



-25° +50°C



Free



IP20

WARRANTY 2 YEARS

General parameters

Light source replaceable end user

Electrical parameters

Rated voltage, frequency AC 220-240 V, 50/60 Hz

Input interface Free wire ends

Additional information

Place of installation Ceiling, Recessed

Place of application indoor

Impact protection IK07

Housing colour White

Operating temperature range -25° +50°C

Mercury content Does not contain

Ingress protection IP20

Housing material Aluminum

Dimensions

EAN 4820246482974

Height 46 mm

Recessed spotlight luminaire VL-SPF09S-W

INDEX: VL-SPF09S-W


Depth 92 mm

Width 92 mm

Outer box 50 pcs.



INDEX: VL-SPF09S-W

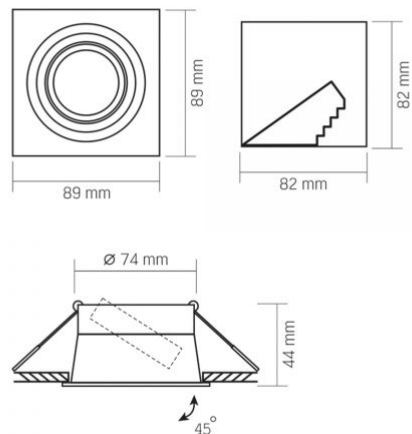

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.



The product must be used indoors



IK07

The product withstands a medium impact (e.g., from a blunt object)



-25° +50°C

Operating temperatures range



Free

The product does not contain mercury



IP20

Class of protection against dust and moisture.
Protection against solid objects larger than 12 mm;
no protection against moisture