

TECHNICAL CARD



Facade double-sided luminaire



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®



IK07



-25° +50°C



Free



IP54

WARRANTY 2 YEARS

General parameters

Light source replaceable end user

Electrical parameters

Rated voltage, frequency AC 220-240 V, 50/60 Hz

Input interface Terminal block

Electric shock protection class I

Additional information

Place of installation Wall

Place of application outdoor

Impact protection IK07

Housing colour Gray

Operating temperature range -25° +50°C

Mercury content Does not contain

Ingress protection IP54

Housing material Aluminum

Dimensions

EAN 4820246482363

Outer box 12 pcs.

VIDEX-2XE27-PORTER-GRAY

INDEX: VL-AR082G



Height 300 mm

Width 108 mm

Depth 165 mm



INDEX: VL-AR082G

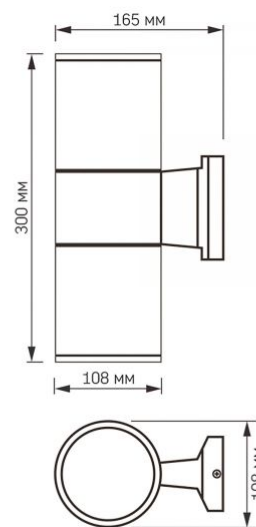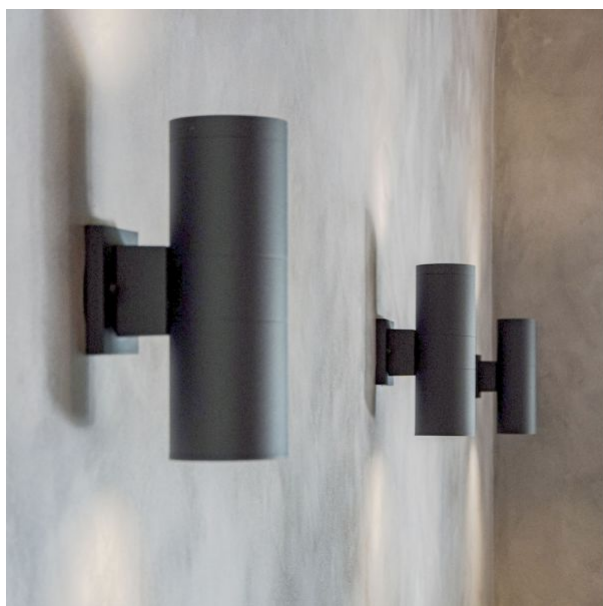

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.



The product must be used outdoors



Protection against electric shock class I. A product in which the means of protection against electric shock, in addition to the main insulation, is an additional protective circuit connected to the grounding of the power supply network



IK07

— The product withstands a medium impact (e.g., from a blunt object)



-25°+50°C

— Operating temperatures range



Free

— The product does not contain mercury



IP54

— Class of protection against dust and moisture. The product is protected against the ingress of water and dust particles into the housing