

VIDEX®

VIDEX-E27-A60-12W-NW

INDEX: VLE-A60e-12274

TECHNICAL CARD



LED Bulb



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®



240°



Ra ≥ 80

ON/OFF
20 000

20 000 h



Not Dimmable



-20° +40°C



CCT 4000K



Free



IP20

WARRANTY 2 YEARS

NEUTRAL WHITE



4000K

Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

General parameters

Light source or containing product Light source

Type of light source

Energy class of the light source	F
Dimmable	no
Directional (DLS) or non-directional (NDLS) light source	NDLS
Connected light source (cls)	no
Color-tunable light source	no
Mains (MLS) or non-mains (NMLS) light source	MLS
High luminance light source	No
Anti-glare shield	No
Technology	LED

VIDEX-E27-A60-12W-NW

INDEX: VLE-A60e-12274

Electrical parameters

On-mode power (Pon)	12 W
Rated voltage, frequency	AC 220-240 V, 50/60 Hz
Rated current	104 mA
Displacement factor (cos φ1)	0.7
Survival factor	0.9
Energy consumption in on-mode of the light source (kWh/1000h)	12

Photometric parameters

Useful luminous flux (Φuse)	1180 Lm
Correlated color temperature	4000K (neutral white)
Beam angle	240°
Color rendering index (CRI)	Ra > 80
On/Off cycles	20000
Lifetime (L70B50)	20000 h
Useful luminous flux of the light source reference	in a sphere (360°)
Chromaticity coordinates (x)	0.38
Chromaticity coordinates (y)	0.38
R9 colour rendering index value	>0
The lumen maintenance factor	≥94.8%
Colour consistency in MacAdam ellipses (SDCM)	<6 (4000K)
CRI Min	Ra 80
CRI Max	Ra 88

VIDEX®

VIDEX-E27-A60-12W-NW
INDEX: VLE-A60e-12274

Additional information

Place of application	indoor
Operating temperature range	-20° +40°C
Mercury content	Does not contain
Ingress protection	IP20

Dimensions

EAN	5904405540282
In the package	1 pc.
Height	118 mm
Outer box	20 pcs.
Width	60 mm
Depth	60 mm
Unit nett weight	38g

Signs marking goods

Packaging marking


Recycling of waste, CE, Not suitable for use under moisture, Utilization



VIDEX®

VIDEX-E27-A60-12W-NW

INDEX: VLE-A60e-12274

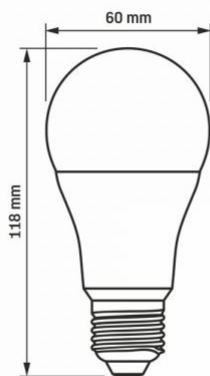

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.

	The product must be used indoors
	Waste recycling after the end of the product's service life
	The product meets the requirements of EU directives
	Not suitable for use under moisture
	It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste
	— Rated beam angle 240°
	— Ra > 80 - color rendering index Ra > 80
	— Rated On/off cycles ON/OFF 20 000
	— Nominal lifetime (hours) 20 000 h
	— The product is incompatible with light regulators Not Dimmable
	— Operating temperatures range -20° +40°C
	— Colour consistency in MacAdam ellipses (SDCM) + ΔS_{Duv} CCT 4000K
	— The product does not contain mercury Free
	— Class of protection against dust and moisture. Protection against solid objects larger than 12 mm; no protection against moisture IP20