

VIDEX®

VIDEX-E27-A96-30W-NW

INDEX: VLE-A96-30274


TECHNICAL CARD



LED Bulb



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

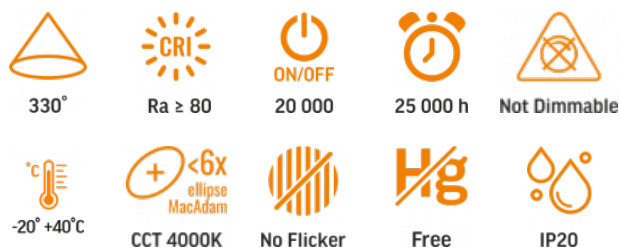VIDEX®


WARRANTY 2 YEARS



Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutrálno bijela / Neutralweiß / Alb neutru / Neutrus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

General parameters

Light source or containing product Light source

Type of light source

Energy class of the light source	F
Dimmable	no
Technology	LED

Electrical parameters

On-mode power (Pon)	30 W
Rated voltage, frequency	AC 176-264 V, 50/60 Hz
Rated current	140 mA
Energy consumption in on-mode of the light source (kWh/1000h)	30

VIDEX-E27-A96-30W-NW
INDEX: VLE-A96-30274

Photometric parameters

Useful luminous flux (Φuse)	3200 Lm
Correlated color temperature	4000K (neutral white)
Beam angle	330°
Color rendering index (CRI)	Ra > 80
On/Off cycles	20000
Lifetime	25000 h
Useful luminous flux of the light source reference	in a sphere (360°)
Colour consistency in MacAdam ellipses (SDCM)	<6 (4000K)
Flicker metric (Pst LM)	≤1
CRI Min	Ra 80
CRI Max	Ra 88

Additional information

Place of application	indoor
Operating temperature range	-20° +40°C
Mercury content	Does not contain
Ingress protection	IP20

Dimensions

EAN	5904405540190
Height	228 mm
Depth	96 mm
Width	96 mm
In the package	1 pc.

VIDEX®

VIDEX-E27-A96-30W-NW

INDEX: VLE-A96-30274



Outer box

20 pcs.

Signs marking goods

Packaging marking

CE, Not
suitable for use
under
moisture,
Utilization

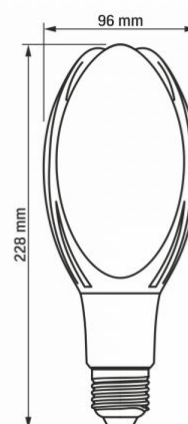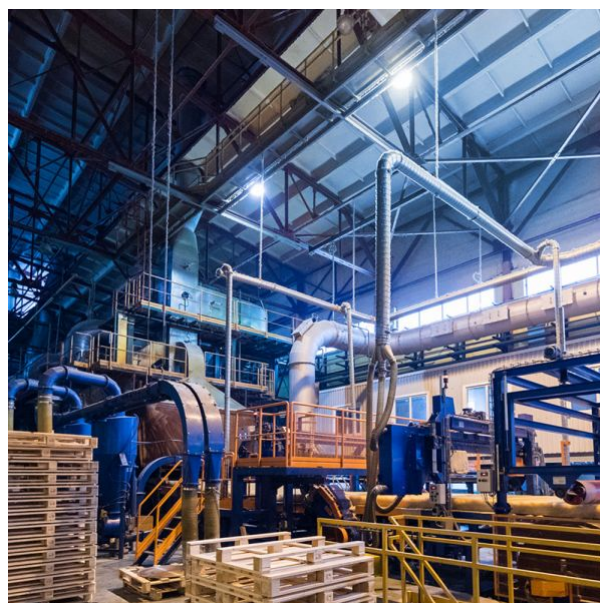

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.





The product must be used indoors



The product meets the requirements of EU directives



Not suitable for use under moisture



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



330°

— Rated beam angle



Ra ≥ 80

— Ra > 80 – color rendering index



ON/OFF
20 000

— Rated On/off cycles



25 000 h

— Nominal lifetime (hours)



Not Dimmable

— The product is incompatible with light regulators



-20° +40°C

— Operating temperatures range



CCT 4000K

— Colour consistency in MacAdam ellipses (SDCM)



No Flicker

— The flickering of the light does not exceed the permissible level



Free

— The product does not contain mercury



IP20

— Class of protection against dust and moisture. Protection against solid objects larger than 12 mm; no protection against moisture